

On the Complexity of Core, Kernel, and Bargaining Set

Gianluigi Greco^a, Enrico Malizia^b, Luigi Palopoli^b, Francesco Scarcello^b

^a*Dipartimento di Matematica, Università della Calabria, I-87036 Rende(CS), Italy*

^b*DEIS, Università della Calabria, I-87036 Rende(CS), Italy*

Abstract

Coalitional games are mathematical models suited to analyze scenarios where players can collaborate by forming coalitions in order to obtain higher worths than by acting in isolation. A fundamental problem for coalitional games is to single out the most desirable outcomes in terms of appropriate notions of worth distributions, which are usually called solution concepts. Motivated by the fact that decisions taken by realistic players cannot involve unbounded resources, recent computer science literature reconsidered the definition of such concepts by advocating the relevance of assessing the amount of resources needed for their computation in terms of their computational complexity. By following this avenue of research, the paper provides a complete picture of the complexity issues arising with three prominent solution concepts for coalitional games with transferable utility, namely, the core, the kernel, and the bargaining set, whenever the game worth-function is represented in some reasonable compact form (otherwise, if the worths of all coalitions are explicitly listed, the input sizes are so large that complexity problems are—artificially—trivial). The starting investigation point is the setting of graph games, about which various open questions were stated in the literature. The paper gives an answer to these questions, and in addition provides new insights on the setting, by characterizing the computational complexity of the three concepts in some relevant generalizations and specializations.

Keywords: Coalitional Games, Compact Games, Solution Concepts, Computational Complexity

1. Introduction

Coalitional games have been introduced by von Neumann and Morgenstern [1] to characterize stable payoff distributions in scenarios where players can collaborate by forming coalitions in order to obtain higher worths than by acting in isolation. A *coalitional game* (with transferable utility) can abstractly be

Email addresses: ggreco@mat.unical.it (Gianluigi Greco), emalizia@deis.unical.it (Enrico Malizia), palopoli@deis.unical.it (Luigi Palopoli), scarcello@deis.unical.it (Francesco Scarcello)

modelled as a pair $\mathcal{G} = \langle N, v \rangle$, where N is a finite set of players, and where v is a function associating with each coalition $S \subseteq N$ a certain worth $v(S) \in \mathbb{R}$ that players in S may obtain by collaborating with each other. The outcome of $\mathcal{G}$ is an *imputation*, i.e., a vector of payoffs $(x_i)_{i \in N}$ meant to specify the distribution of the total worth $v(N)$ granted to each player in N . Imputations are required to be *efficient*, i.e., $\sum_{i \in N} x_i = v(N)$, and *individually rational*, i.e., $x_i \geq v(\{i\})$, for each $i \in N$. In the following, the set of all imputations of $\mathcal{G}$ is denoted by $X(\mathcal{G})$.

It is easily seen that, for any given coalitional game $\mathcal{G}$, the set $X(\mathcal{G})$ might even contain infinitely many payoff vectors. In this context, a fundamental problem is to single out the most desirable ones in terms of appropriate notions of worth distributions, which are usually called *solution concepts*. Traditionally, this question has been studied in economics and game theory in the light of providing arguments and counterarguments about why such proposals are reasonable mathematical renderings of the intuitive concepts of fairness and stability. For instance, well-known and widely-accepted solution concepts are the *Shapely value*, the *core*, the *kernel*, the *bargaining set*, and the *nucleolus* (see, e.g., [2]). Each solution concept defines a set of outcomes that are referred to with the name of the underlying concept—e.g., the “core of a game” is the set of those outcomes satisfying the conditions associated with the concept of core.

More recently, Deng and Papadimitriou [3] reconsidered the definition of solution concepts for coalitional games from a computer science perspective, by arguing that decisions taken by realistic agents cannot involve unbounded resources to support reasoning [3, 4], and by suggesting to formally capture the bounded rationality principle by assessing the amount of resources needed to compute solution concepts in terms of their computational complexity [3, 5]. In particular, it has been pointed out that such questions related to the complexity of solution concepts are of particular interest whenever worth functions are encoded in some succinct way, e.g., they are given in terms of polynomially computable functions [3]. Indeed, under the naïve perspective of explicitly listing all associations of coalitions with their worths, the exponential blow-up of the input representation (w.r.t. the number of involved players) would hide the intrinsic complexity of the solutions concepts. Coalitional games whose worth functions are encoded without necessarily listing all coalition worths are called *compact games*. In fact, inspired by the approach of Deng and Papadimitriou [3], the computational complexity of various solution concepts over different classes of compact games has intensively been studied in the last few years (see, e.g., [6, 7, 8, 9, 10]).

In this paper, we continue along the line of research initiated by Deng and Papadimitriou, by analyzing the computational complexity of three prominent solutions concepts (the core, the kernel, and the bargaining set) over classes of compact games. Before illustrating our contribution, we next provide details on the classes of games considered in the paper and overview the relevant related literature.




Figure 1: The graph game in Example 1.1.

1.1. Compactly Specified Games: Graph Games and Marginal Contribution Nets

Graph Games. The setting of *graph games* is precisely the one analyzed by Deng and Papadimitriou [3]. In graph games, worths for coalitions over a set N of players are defined based on a weighted undirected graph $G = \langle (N, E), w \rangle$, whose nodes in N correspond to the players, and where the list w encodes the edge weighting function, so that $w(e) \in \mathbb{R}$ is the weight associated with the edge $e \in E$. Then, the worth of an arbitrary coalition $S \subseteq N$ is defined as the sum of the weights associated with the edges contained in S , i.e., as the value $v(S) = \sum_{e \in E | e \subseteq S} w(e)$.

Example 1.1. Consider the graph game in Figure 1 formed by the players in $\{a, b, c, d\}$. There, the coalition $\{a, b\}$ gets a worth $v(\{a, b\}) = 2$, while the coalition $\{a, b, d\}$ gets a worth $v(\{a, b, d\}) = 3 + 2 - 1 = 4$. Note that the graph encodes 2^4 coalition worths, via 5 weights only. In such a representation, $O(n^2)$ weights succinctly encode the 2^n coalition worths, where n is the number of players. $\triangleleft$

Within the setting of graph games, Deng and Papadimitriou [3] characterized the intrinsic complexity of various tasks, mainly focusing on problems related to the core. For instance, they showed that checking whether the core is non-empty and that checking whether a payoff vector belongs to the core are co-NP-complete problems. Moreover, they provided a polynomial-time computable closed-form characterization for the Shapely value, and showed that this value coincides with the (pre)nucleolus. And, finally, they completed the picture of the complexity issues arising with graph games by showing the NP-hardness of deciding whether a payoff vector belongs to the bargaining set and by *conjecturing* the following two results on graph games:

- (C1) *Deciding whether a payoff vector belongs to the bargaining set is Π_2^P -complete; and*
- (C2) *Deciding whether a payoff vector belongs to the kernel is NP-hard.*

Marginal Contribution Nets. A class of compact games that received considerable attention in the last few years is that of (games encoded via) *marginal contribution networks*, proposed by Ieong and Shoham [6]. A marginal contribution network (short: MC-net) is constituted by a set of rules, each one having

the form: $\{pattern\} \rightarrow value$, where a *pattern* is a conjunction that may include both positive and negative literals, with each literal denoting a player, and *value* is the additive contribution associated with this pattern. A rule is said to apply to a coalition S if all the players whose literals occur positively in the pattern belong to S , and all the players whose literals occur negatively in the pattern do not belong to S . When more than one rule applies to a coalition, the value for that coalition is given by the contribution of all those rules, i.e., by the sum of their values. If no rule applies, then the value for the coalition is set to zero, by default.

Example 1.2. Consider the following marginal contribution network including the following three rules $\{a \wedge b\} \rightarrow 5$, $\{b\} \rightarrow 2$, and $\{a \wedge \neg b\} \rightarrow 3$, over the players in $\{a, b\}$.

The network defines a coalitional game such that: $v(\{a\}) = 3$ (the third rule applies), $v(\{b\}) = 2$ (the second rule applies), and $v(\{a, b\}) = 5 + 2 = 7$ (both the first and the second rules apply, but not the third one). $\triangleleft$

The “structure” of player interactions in MC-nets is represented via their associated *agent graphs* [6]. The agent graph associated with an MC-net is the undirected graph whose nodes are the players of the game, and where for each rule $\{pattern\} \rightarrow value$, the subgraph induced over the players occurring together in *pattern* is a clique, weighted by *value*.

For any graph game $G = \langle (N, E), w \rangle$, there is an equivalent MC-net representation having the same size, and whose “structure” is preserved in that its associated agent graph coincides with G . Indeed, given any game specified via the graph $G = \langle (N, E), w \rangle$, we can just create the rule $\{i \wedge j\} \rightarrow w(e)$, for each edge $e = \{i, j\} \in E$ (cf. [6]). However, the converse is not true, since MC-nets allow to express any arbitrary coalitional game, while graph games are not fully expressive. For instance, graph games cannot model a scenario where a group of agents S has value of 1 if, and only if, $|S| > |N|/2$ (see [6], for details on the expressiveness of the frameworks).

In the light of the above observations, hardness results for graph games immediately hold over marginal contribution networks. For instance, checking whether a payoff vector is in the core and checking whether the core is non-empty are co-**NP**-hard problems on MC-nets. Symmetrically, membership results for MC-nets also hold for graph games, even when they are established over some “structurally” restricted classes of games (because the structure is preserved). For instance, on marginal contribution networks associated with *acyclic* agent graphs or, more generally, with agent graphs having *bounded treewidth* [11], Ieong and Shoham [6] showed that deciding whether a payoff vector is in the core and deciding the non-emptiness of the core are feasible in polynomial time; therefore, these feasibility results immediately apply to graph games.

Moreover, Ieong and Shoham [6] proved that checking whether a payoff vector is in the core of a game encoded via marginal contribution networks is in co-**NP** (as for the class of graph games). However, they left as an intriguing open problem the following (which, in fact, does not follow from the corresponding result on graph games):

(O1) *Is the problem of deciding core non-emptiness over MC-nets feasible in co-NP?*

Indeed, they observed that the “obvious” certificate of non-emptiness of the core based on the Bondareva-Shapley theorem is exponential in size. Thus, it cannot help deriving the corresponding membership in co-NP. And, in fact, different technical machineries have to be used for facing the question.

1.2. Contributions

In this paper, we analyze the computational complexity of the core, the kernel, and the bargaining set over graph games and marginal contribution networks. In particular, we show that conjectures **(C1)** and **(C2)** by Deng and Papadimitriou are correct, and we provide a positive answer to question **(O1)** by Yeong and Shoham. In detail, as our main technical contributions, we show that:

- On graph games, checking whether a payoff vector is in the kernel is **NP**-hard, and actually Δ_2^P -complete;
- On graph games, checking whether a payoff vector is in the bargaining set is Π_2^P -complete; and,
- On marginal contribution networks, checking whether the core is non-empty is feasible in co-NP.

These main achievements come, however, not alone in the research reported in the paper. Indeed, we go beyond and study the computational issues arising in relevant *generalizations* and *specializations* of the setting of graph games.

Generalizations: We consider an abstraction of compact coalitional games that is based on assuming that the worth function is provided as an *oracle* operating over some given structure encoding the game. In particular, we analyze the cases where each oracle call requires deterministic and non-deterministic polynomial time (w.r.t. the size of the game), respectively; that is, the cases where the oracle encodes a function in **FP** or in **NPSV**, respectively. As an example, graph games and marginal contribution networks are just two instances of the former setting. Instead, **NPSV** oracles are much more powerful, since they can be used to encode games where coalition worths are the result of complex algorithmic procedures, such as scheduling, planning or routing activities.

Within this abstract setting, we show that nothing has to be paid for the succinctness of the specifications, since all the membership results that hold for graph games also hold for any such class as of compact games. Notably and surprisingly, this is true not only for games whose worth functions can be computed by a deterministic polynomial-time oracle, but even for the cases where **NPSV** oracles are used. Indeed, we show that:

Problem	Graph Games	MC-nets	General
CORE-CHECK	co-NP-complete [‡] [3]	co-NP-complete [‡] [6]	co-NP-complete
CORE-NONEMPTYNESS	co-NP-complete [‡] [3]	co-NP-complete ^{‡,*}	co-NP-complete
KERNEL-CHECK	Δ_2^P -complete [‡]	Δ_2^P -complete	Δ_2^P -complete
BARGAININGSET-CHECK	Π_2^P -complete	Π_2^P -complete	Π_2^P -complete

Figure 2: Summary of results. Hardness results on checking problems hold even if the payoff vector is actually an imputation. [‡]Feasible in polynomial time on structures having bounded treewidth. *Hardness and feasibility in polynomial time on structures having bounded treewidth are shown in [6].

- On games defined via non-deterministic polynomial time oracles, the problems of checking whether a payoff vector belongs to the core, the kernel, and the bargaining set are (still) feasible in co-NP, Δ_2^P , Π_2^P , respectively; and
- On games defined via non-deterministic polynomial time oracles, checking whether the core is non-empty is (still) feasible in co-NP.

Specializations: Finally, by following the perspective adopted by Jeong and Shoham [6], we analyze the complexity of the kernel in “structurally restricted” graph games. In particular, we show that this concept can be expressed in terms of an optimization problem over *Monadic Second Order Logic (MSO)* formulae. Based on this encoding and by exploiting Courcelle’s Theorem [12] and its generalization to optimization problems due to Arnborg, Lagergren, and Seese [13], we show that:

- On graph games having bounded treewidth, checking whether a payoff vector is in the kernel is feasible in polynomial time (w.r.t. the size of the game measured as the number of its nodes, plus the number of its edges, plus all the values of the weights associated with it—or, equivalently, plus the number of the bits necessary to store such weights in unary notation).

A summary of our results is reported in Figure 2, where CORE-CHECK, KERNEL-CHECK, and BARGAININGSET-CHECK denote the problem of checking whether a payoff vector belongs to the core, the kernel, and the bargaining set, respectively, and where CORE-NONEMPTYNESS denotes the problem of checking core non-emptiness—in fact, recall that kernel and bargaining set are always not empty (unless there is no imputation at all) [2], and hence the corresponding non-emptiness problem is immaterial for them.

1.3. Organization

The rest of the paper is organized as follows. Preliminaries on computational complexity are reported in Section 2. An abstract framework for compact games is discussed in detail in Section 3. The complexity of core, kernel, and bargaining set is analyzed in Sections 4, 5, and 6, respectively. Eventually, a few final remarks and discussions on some open problems are reported in Section 7.

2. Preliminaries on Computational Complexity

In this section we recall some basic definitions about complexity theory, by referring the reader to the work of Johnson [14] for more on this.

2.1. The Complexity of Decision Problems: $\mathbf{P}$, $\mathbf{NP}$, and $\mathbf{co-NP}$

Decision problems are maps from strings (encoding the input instance over a fixed alphabet, e.g., the binary alphabet $\{0, 1\}$) to the set $\{\text{"yes"}, \text{"no"}\}$. The class $\mathbf{P}$ is the set of decision problems that can be solved by a deterministic Turing machine in polynomial time with respect to the input size, that is, with respect to the length of the string that encodes the input instance. For a given input x , its size is usually denoted by $\|x\|$.

Throughout the paper, we shall often refer to computations done by *non-deterministic* Turing machines, too. Recall that these are Turing machines that, at some points of the computation, may not have one single next action to perform, but a *choice* between several possible next actions. A non-deterministic Turing machine answers a decision problem if, on any input x , (i) there is at least one sequence of choices leading to halt in an accepting state if x is a “yes” instance (such a sequence is called accepting computation path); and (ii) all possible sequences of choices lead to a rejecting state if x is a “no” instance.

The class of decision problems that can be solved by non-deterministic Turing machines in polynomial time is denoted by $\mathbf{NP}$. Problems in $\mathbf{NP}$ enjoy a remarkable property: any “yes” instance x has a *certificate* of it being a “yes” instance, which has polynomial length and which can be checked in polynomial time (in the size $\|x\|$). As an example, deciding whether a Boolean formula Φ over the variables $X_1, \dots, X_n$ is satisfiable, i.e., deciding whether there exists some truth assignment to the variables making Φ true, is a well-known problem in $\mathbf{NP}$; in fact, any satisfying truth assignment for Φ is obviously a certificate that Φ is a “yes” instance, i.e., that Φ is satisfiable.

The class of problems whose complementary problems are in $\mathbf{NP}$ is denoted by $\mathbf{co-NP}$. As an example, the problem of deciding whether a Boolean formula Φ is *not* satisfiable is in $\mathbf{co-NP}$. Of course, the class $\mathbf{P}$ is contained in both $\mathbf{NP}$ and $\mathbf{co-NP}$.

2.2. Further Complexity Classes: The Polynomial Hierarchy

Throughout the paper, we shall also refer to a type of computation called computation with *oracles*. Intuitively, oracles are subroutines which are supposed to have unary cost.

The classes Σ_k^P , Π_k^P , and Δ_k^P , forming the *polynomial hierarchy*, are defined as follows: $\Sigma_0^P = \Pi_0^P = \mathbf{P}$ and for all $k \geq 1$, $\Sigma_k^P = \mathbf{NP}^{\Sigma_{k-1}^P}$, $\Delta_k^P = \mathbf{P}^{\Sigma_{k-1}^P}$, and $\Pi_k^P = \mathbf{co-}\Sigma_k^P$ where $\mathbf{co-}\Sigma_k^P$ denotes the class of problems whose complementary problem is solvable in Σ_k^P . Here, Σ_k^P (resp., Δ_k^P) models computability by a non-deterministic (resp., deterministic) polynomial-time Turing machine that may use an oracle in Σ_{k-1}^P . Note that Σ_1^P coincides with $\mathbf{NP}$, and that Π_1^P coincides with $\mathbf{co-NP}$.

A well-known problem at the k -th level of the polynomial hierarchy is deciding the validity of a quantified Boolean formula with k quantifier alternations. A quantified Boolean formula (short: QBF) with k quantifier alternations has the form $Q_1 \bar{X}_1 Q_2 \bar{X}_2 \dots Q_k \bar{X}_k \Phi$, where $k \geq 1$, $\bar{X}_i$ ($1 \leq i \leq k$) is a set of variables, $Q_i \in \{\exists, \forall\}$ ($1 \leq i \leq k$), $Q_i \neq Q_{i+1}$ ($1 \leq i < k$), and Φ is a Boolean formula over the variables in $\bigcup_{i=1}^k \bar{X}_i$. The set of all quantified Boolean formulas with k quantifier alternations and $Q_1 = \exists$ (resp., $Q_1 = \forall$) is denoted by $\text{QBF}_{k,\exists}$ (resp., $\text{QBF}_{k,\forall}$). Deciding the validity of a quantified Boolean formula in $\text{QBF}_{k,\exists}$ (resp., $\text{QBF}_{k,\forall}$) is a well-known problem in Σ_k^P (resp., Π_k^P). Note that for $k = 1$, this problem coincides with the problem of deciding whether the Boolean formula Φ is satisfiable (resp., not satisfiable), which is indeed in **NP** (resp., co-**NP**).

2.3. Reductions among Decision Problems

A decision problem A_1 is *polynomially reducible* to a decision problem A_2 , denoted by $A_1 \leq_p A_2$, if there is a polynomial time computable function h (called reduction) such that, for every x , $h(x)$ is defined and x is a “yes” instance of A_1 if, and only if, $h(x)$ is a “yes” instance of A_2 . A decision problem A is *complete* for a class $\mathcal{C}$ of the polynomial hierarchy (at any level $k \geq 1$, i.e., beyond **P**) if A belongs to $\mathcal{C}$ and every problem in $\mathcal{C}$ is polynomially reducible to A . Thus, problems that are complete for $\mathcal{C}$ are the most difficult problems in $\mathcal{C}$.

It is worthwhile observing that all problems mentioned in this section are known to be complete for the classes in which their membership has been pointed out. In particular, deciding the validity of a $\text{QBF}_{k,\exists}$ (resp., $\text{QBF}_{k,\forall}$) formula is the prototypical Σ_k^P -complete (resp., Π_k^P -complete) problem.

2.4. Complexity Classes of Functions

All the aforementioned problems are decision ones, but very often we are interested in *search* problems where, for any given instance, a (non-Boolean) solution must be computed. The complexity classes of functions allow us to distinguish such problems according to their intrinsic difficulties, which is particularly relevant when their associated decision problems belong to the same complexity class.

Let a finite *alphabet* Σ with at least two elements be given. A (*partial*) *multivalued (MV) function* $f : \Sigma^* \mapsto \Sigma^*$ associates no, one or several outcomes (*results*) with each input string. Let $f(x)$ stand for the set of possible results of f on an input string x ; thus, we write $y \in f(x)$ if y is a value of f on the input string x . Define $\text{dom}(f) = \{x \mid \exists y(y \in f(x))\}$ and $\text{graph}(f) = \{\langle x, y \rangle \mid x \in \text{dom}(f), y \in f(x)\}$. If $x \notin \text{dom}(f)$, we will say that f is undefined at x . The function f is *total* if $\text{dom}(f) = \Sigma^*$.

An MV function f is *polynomially balanced* if, for each x , the size of each result in $f(x)$ is polynomially bounded in the size of x .

The class **NPMV** is defined as the set of all MV functions f such that both (i) f is polynomially balanced and (ii) $\text{graph}(f)$ is in **NP**. By analogy, the class

$\mathbf{NPMV}_g$ is defined as the class of all polynomially-balanced multivalued functions f for which $\text{graph}(f)$ is in $\mathbf{P}$. If we deal with *(partial) single-valued functions*, we get the corresponding classes $\mathbf{NPSV}$ and $\mathbf{NPSV}_g$, respectively [15].

A *transducer* is a (possibly, non-deterministic) Turing machine T on the alphabet Σ with a read-only input tape, a read-write work tape, and a write-only output tape. For any string $x \in \Sigma^*$, we say that T accepts x if T has an accepting computation-path on x . For each $x \in \Sigma^*$ accepted by T , we denote by $T(x)$ the set of all strings that are written by T on the output tape in its accepting computation-paths on input string x . Thus, every transducer is associated with some MV function f (we say that T *computes* f) such that, for each $x \in \Sigma^*$, $f(x) = T(x)$ if x is accepted by T ; otherwise, f is undefined at x (i.e., $x \notin \text{dom}(f)$).

Note that the class $\mathbf{FP}$ consists of all functions that are computed by deterministic Turing transducers in polynomial time.

Functions in $\mathbf{NPMV}$ are characterized in terms of Turing machines as follows.

Fact 2.1. *An MV function is in $\mathbf{NPMV}$ if and only if it is computed by a nondeterministic transducer in polynomial time.*

It is worthwhile noting the difference between the two classes $\mathbf{NPMV}_g$ and $\mathbf{NPMV}$, which contains more complex functions than $\mathbf{NPMV}_g$ (assuming $\mathbf{P} \neq \mathbf{NP}$). For instance, consider the problem of computing the partial MV function f_H that, given a graph G , outputs the Hamiltonian cycles of G (if any). This function is in $\mathbf{NPMV}_g$ since $\text{graph}(f_H)$ is polynomially balanced and decidable in deterministic polynomial time (for any pair $\langle G, C \rangle$, just check whether C is a Hamiltonian cycle of G). Let us consider now the weighted version of this problem, where the input graph G is edge-weighted, and the function values are the weights of Hamiltonian cycles of G (if any). Then, this partial MV function, say f_{WH} , belongs to $\mathbf{NPMV}$ but not to $\mathbf{NPMV}_g$ (unless $\mathbf{P} = \mathbf{NP}$). Indeed, deciding whether a given pair $\langle G, w \rangle$ (graph, weight) belongs to $\text{graph}(f_{WH})$ is clearly $\mathbf{NP}$ -complete (one needs some Hamiltonian cycle having weight w to recognize it as a correct function value).

3. A Formal Framework for Compact Representations

Graph games and marginal contribution networks are two prominent examples of coalitional games whose worth functions are defined in terms of some suitable (combinatorial) structure, instead of listing the worths of all coalitions. In this section, we generalize these two schemes by formalizing the notion of compact representation for coalitional games.

Any *compact representation* $\mathcal{R}$ defines suitable encodings for a set of coalitional games, denoted by $\mathcal{C}(\mathcal{R})$. If all games may be represented by $\mathcal{R}$, we say that this representation is *complete*. For any game $\mathcal{G} \in \mathcal{C}(\mathcal{R})$, $\mathcal{R}$ defines an encoding $\xi^{\mathcal{R}}(\mathcal{G})$ of the game, and a worth function $v^{\mathcal{R}}(\cdot, \cdot)$ that, given $\xi^{\mathcal{R}}(\mathcal{G})$ and a set S of players of $\mathcal{G}$, outputs the worth $v^{\mathcal{R}}(\xi^{\mathcal{R}}(\mathcal{G}), S)$ associated with the coalition S according to $\mathcal{G}$.

For instance, consider the graph-games representation $\mathcal{GG}$: any game $\mathcal{G} \in \mathcal{C}(\mathcal{GG})$ is encoded as a weighted graph $\xi^{\mathcal{GG}}(\mathcal{G})$, and the worth function $v^{\mathcal{GG}}(\xi^{\mathcal{GG}}(\mathcal{G}), S)$ is computed for every coalition S by taking the sum of the weights of all edges of $\xi^{\mathcal{GG}}(\mathcal{G})$ included in S .

For the case of the marginal-contribution nets compact-representation $\mathcal{MCN}$, any game $\mathcal{G}$ is encoded by a set of rules $\xi^{\mathcal{MCN}}(\mathcal{G})$, and the worth-function $v^{\mathcal{MCN}}(\xi^{\mathcal{MCN}}(\mathcal{G}), S)$ computes the worth of S as the sum of the values of those rules fired by players in S .

Definition 3.1. We say that $\mathcal{R}$ is a *polynomial-time compact representation* (short: **P**-representation) if the *worth-function* $v^{\mathcal{R}}(\cdot, \cdot)$ belongs to **FP**, i.e., it is polynomial-time computable by a deterministic transducer.

We say that $\mathcal{R}$ is a *non-deterministic polynomial-time compact representation* (short: **NP**-representation) if the *worth-function* $v^{\mathcal{R}}(\cdot, \cdot)$ belongs to **NPSV**, i.e., it is polynomial-time computable by a non-deterministic transducer. $\square$

Note that both $\mathcal{GG}$ and $\mathcal{MCN}$ are based on worth functions that are efficiently computable, and in fact both of them are polynomial-time compact representations.

An interesting feature of a compact representation is its *expressive power*. Firstly, one may ask whether $\mathcal{R}$ is complete or not, that is, whether it is the case that every coalitional game belongs to $\mathcal{C}(\mathcal{R})$. For instance $\mathcal{MCN}$ is a complete representation, while $\mathcal{GG}$ is not. However, as a consequence of completeness, for some games $\mathcal{MCN}$ is not able to provide succinct representations. In fact, it is known that there are games whose $\mathcal{MCN}$ encodings have size exponential in the number of players [16]. Therefore, for a pair of compact representations $\mathcal{R}_1$ and $\mathcal{R}_2$, one may wonder about the relationship between $\mathcal{C}(\mathcal{R}_1)$ and $\mathcal{C}(\mathcal{R}_2)$, and about the ability to represent games in a more or less succinct way. Formally, we say that $\mathcal{R}_2$ is at least as expressive (and succinct) as $\mathcal{R}_1$, denoted by $\mathcal{R}_1 \preceq_e \mathcal{R}_2$, if there exists a function f in **FP** that translates a game $\xi^{\mathcal{R}_1}(\mathcal{G})$ represented in $\mathcal{R}_1$ into an equivalent game $\xi^{\mathcal{R}_2}(\mathcal{G})$ represented in $\mathcal{R}_2$, that is, into a game with the same worth function as the former one. More precisely, we require that, for $\xi^{\mathcal{R}_2}(\mathcal{G}) = f(\xi^{\mathcal{R}_1}(\mathcal{G}))$, $v^{\mathcal{R}_1}(\xi^{\mathcal{R}_1}(\mathcal{G}), S) = v^{\mathcal{R}_2}(\xi^{\mathcal{R}_2}(\mathcal{G}), S)$, for each coalition of players S in the game $\mathcal{G}$.

For instance, it can easily be shown that $\mathcal{GG} \preceq_e \mathcal{MCN}$. In the rest of the paper, we shall provide complexity results for $\mathcal{GG}$, $\mathcal{MCN}$, and for arbitrary **P** and **NP** compact representations.

For the sake of presentation, whenever a compact representation $\mathcal{R}$ is understood, we just write $\mathcal{G}$ instead of $\xi^{\mathcal{R}}(\mathcal{G})$, and $v(S)$ instead of $v^{\mathcal{R}}(\xi^{\mathcal{R}}(\mathcal{G}), S)$.

4. The Complexity of the Core

The concept of the *core* goes back to the work of Edgeworth [17] and it has been formalized by Gillies [18]. To review its definition, we need to state some preliminary concepts and notations, which will extensively be used throughout the paper.

For any coalition $S \subseteq N$, let $|S|$ denote the cardinality of S , and let $\mathbb{R}^S$ be the $|S|$ -dimensional real coordinate space, whose coordinates are labeled by the members of S ; in particular, given a *payoff vector* $x \in \mathbb{R}^S$, x_i denotes the component associated with the player $i \in S$. A vector $x \in \mathbb{R}^S$ is called an S -feasible vector if $\sum_{i \in S} x_i = v(S)$. The value $\sum_{i \in S} x_i$ will be simply denoted by $x(S)$ in the following. Let $\mathcal{G} = \langle N, v \rangle$ be a coalitional game, and let x be an imputation taken from the set $X(\mathcal{G})$ of all imputations of $\mathcal{G}$ —recall from the Introduction that such an x must be efficient, i.e., $\sum_{i \in N} x_i = v(N)$, and individually rational, i.e., $x_i \geq v(\{i\})$, for each $i \in N$. The pair (y, S) is an *objection to x* if y is an S -feasible payoff vector such that $y_k > x_k$ for all $k \in S$.

Definition 4.1. The *core* $\mathcal{C}(\mathcal{G})$ of a coalitional game $\mathcal{G} = \langle N, v \rangle$ is the set of all imputations x to which there is no objection; that is,

$$\mathcal{C}(\mathcal{G}) = \{x \in X(\mathcal{G}) \mid \nexists S \subseteq N \text{ and } y \in \mathbb{R}^S \text{ such that } y(S) = v(S) \text{ and } y_k > x_k, \forall k \in S\}.$$

Thus, an imputation x in the core is “stable” precisely because there is no coalition whose members will receive a higher payoff than in x by leaving the grand-coalition.

It is easily seen that Definition 4.1 can be equivalently restated as the set of all solutions satisfying the following inequalities [see, e.g., 2]:

$$\sum_{i \in S} x_i \geq v(S), \quad \forall S \subseteq N \wedge S \neq \emptyset \quad (1)$$

$$\sum_{i \in N} x_i \leq v(N). \quad (2)$$

In particular, the last inequality, combined with its opposite in (1), enforces the efficiency of solutions; moreover, inequalities in (1) over singleton coalitions enforce their individual rationality.

Example 4.2. Let $\mathcal{G} = \langle N, v \rangle$ be a TU game with $N = \{a, b, c\}$, $v(\{a\}) = v(\{b\}) = v(\{c\}) = 0$, $v(\{a, b\}) = 20$, $v(\{a, c\}) = 30$, $v(\{b, c\}) = 40$, and $v(\{a, b, c\}) = 42$. Consider the imputation x such that: $x_a = 4$, $x_b = 14$, and $x_c = 24$. Since $v(\{b, c\}) = 40 > 38 = x(\{b, c\})$ such imputation x is not in $\mathcal{C}(\mathcal{G})$.

In fact, we can show that $\mathcal{C}(\mathcal{G})$ is empty. To this end, consider coalitions $S_1 = \{a, b\}$, $S_2 = \{a, c\}$ and $S_3 = \{b, c\}$ and the worths associated with them by the worth function. An imputation x to be in $\mathcal{C}(\mathcal{G})$ have to satisfy the following three conditions:

$$x_a + x_b \geq 20$$

$$x_a + x_c \geq 30$$

$$x_b + x_c \geq 40.$$

Summing up these inequalities we obtain that $2x_a + 2x_b + 2x_c \geq 90$, implying that $x_a + x_b + x_c \geq 45$. Thus, the core of $\mathcal{G}$ is empty because the grand-coalition

would need to receive 45 instead of $v(N) = 42$ in order to satisfy the claims of S_1 , S_2 and S_3 .

Consider, instead, the game $\mathcal{G}' = \langle N, v' \rangle$ whose worth function v' is the same as that of $\mathcal{G}$ except for the grand-coalition for which $v'(N) = 45$. Then, it is easily checked that the imputation x' such that $x'_a = 5$, $x'_b = 15$, and $x'_c = 25$ is in $\mathcal{C}(\mathcal{G}')$. $\triangleleft$

As it emerged from the above example, the core of a game can be empty. In fact, checking whether this is not the case is a co-**NP**-hard problem for graph games [3]. It is easy to see that this hardness result can be extended easily to all compact game representations at least as expressive (and succinct) as graph games.

Proposition 4.3. *Let $\mathcal{R}$ be any compact representation such that $\mathcal{GG} \preceq_e \mathcal{R}$ (e.g., $\mathcal{R} = \mathcal{MCN}$). On the class $\mathcal{C}(\mathcal{R})$, CORE-NONEMPTYNESS is co-**NP**-hard.*

Proof. From the co-**NP**-hardness for graph games [3], we know that there is a polynomial-time reduction f_1 from any co-**NP** problem Υ to the core non-emptiness problem for graph games. Moreover, recall from Section 3 that $\mathcal{GG} \preceq_e \mathcal{R}$ means that there exists a polynomial-time function f_2 that translates any graph game $\xi^{\mathcal{GG}}(\mathcal{G})$ into an equivalent game $f_2(\xi^{\mathcal{GG}}(\mathcal{G}))$ belonging to $\mathcal{C}(\mathcal{R})$, that is, into a game with the same worth function and thus the same core as the former one. Therefore, the composition of f_1 and f_2 is a polynomial-time reduction from Υ to the core non-emptiness problem for games in $\mathcal{C}(\mathcal{R})$. $\square$

In fact, for the case of graph games, the precise complexity of the non-emptiness problem for the core is known, as Deng and Papadimitriou [3] have shown that this problem is co-**NP**-complete. However, it was open whether the membership still holds for marginal contribution networks [6] and, possibly, for more general compact representations. In this section, we positively answer this question and show that in fact membership in co-**NP** holds for any class of games $\mathcal{C}(\mathcal{R})$ associated with an **NP** representation scheme $\mathcal{R}$.

In order to get this result, we have to identify some succinct certificate that the core of a game is empty. Indeed, it was observed that the “obvious” certificate of non-emptiness of the core based on the Bondareva-Shapley theorem is exponential in size [6]. The technical machinery that we need is originally due to Helly, who proved the following beautiful result on families of convex sets.

Proposition 4.4 (Helly’s Theorem [19, 20]). *Let $\mathcal{C} = \{c_1, \dots, c_m\}$ be a finite family of convex sets in $\mathbb{R}^n$, where $m > n$. If $\bigcap_{i=1}^m c_i = \emptyset$, there is a set $\mathcal{C}' \subseteq \mathcal{C}$, such that $|\mathcal{C}'| = n + 1$ and $\bigcap_{c_i \in \mathcal{C}'} c_i = \emptyset$.*

However, we next provide a direct proof of the existence of such succinct certificates of infeasibility. Indeed, we believe that our proof provides a nice geometrical interpretation of Helly’s Theorem for the convex sets related with the core, and thus it may be of independent interest for the reader. The approach is based on the well-known fact that, because of inequalities (1) and (2), the core of a coalitional game over N players is a polyhedral set of $\mathbb{R}^N$.

4.0.1. Preliminaries on Polyhedral Sets

We next give some useful definitions and facts about polyhedral sets. We refer the interested reader to any text on this subject for further readings (see, e.g., [21, 22]).

Let $n > 0$ be any natural number. A *Polyhedral Set* (or *Polyhedron*) P of $\mathbb{R}^n$ is the intersection of a finite set $\mathcal{S}$ of closed halfspaces of $\mathbb{R}^n$. Note that in this paper we always assume, unless otherwise stated, that $n > 0$. We denote this polyhedron by $\text{Pol}(\mathcal{S})$.

Recall that a *hyperplane* H of $\mathbb{R}^n$ is a set of points $\{x \in \mathbb{R}^n | a^T x = b\}$, where $a \in \mathbb{R}^n$ and $b \in \mathbb{R}$. The closed *halfspace* H^+ is the set of points $\{x \in \mathbb{R}^n | a^T x \geq b\}$. We say that these points *satisfy* H^+ . We denote the points that do not satisfy this halfspace by H^- , i.e., $H^- = \mathbb{R}^n \setminus H^+ = \{x \in \mathbb{R}^n | a^T x < b\}$. Note that H^- is an open halfspace. We say that H *determines* H^+ and H^- . Define the *opposite* of H^+ as the set of points $\bar{H}^+ = \{x \in \mathbb{R}^n | a'^T x \geq b'\}$, where $a' = -1 \cdot a$ and $b' = -1 \cdot b$. Note that $\bar{H}^+ = H^- \cup H$, since it is the set of points $\{x \in \mathbb{R}^n | a^T x \leq b\}$.

Let $P = \text{Pol}(\mathcal{S})$ be a polyhedron and H a hyperplane. Then, H *cuts* P if both H^+ and H^- contain points of P , and we say that H *passes through* P , if there is a non-empty touching set $C = H \cap P$. Furthermore, we say that H *supports* P , or that it is a *supporting hyperplane* for P , if H does not cut P , but passes through P , i.e., it just touches P , as the only common points of H and P are those in their intersection C .

Moreover, we say that H^+ is a *supporting halfspace* for P if H is a supporting hyperplane for P and $P \subseteq H^+$. Note that $P \subseteq \text{Pol}(\mathcal{S}')$ for any set of halfspaces $\mathcal{S}' \subseteq \mathcal{S}$, since the latter polyhedron is obtained from the intersection of a smaller set of halfspaces than P . We say that such a polyhedron is a *supporting polyhedron* for P .

Recall that, for any set $A \subseteq \mathbb{R}^n$, its dimension $\dim(A)$ is the dimension of its affine hull. For instance, if A consists of two points, or it is a segment, its affine hull is a line and thus $\dim(A) = 1$. By definition, $\dim(\emptyset) = -1$, while single points have dimension 0. For any hyperplane H , $\dim(H) = n - 1$, while the intersection C of any pair of (non-parallel) hyperplanes H_1 and H_2 has dimension $n - 2$.

Every hyperplane H has precisely two normal vectors, while its associated halfspace H^+ has one normal vector, that is, the normal vector of H that belongs to H^+ . The *dihedral angle* $\delta(H_1^+, H_2^+)$ between two non-parallel halfspaces H_1^+ and H_2^+ is the smallest angle between the corresponding normal vectors. For such halfspaces, in this paper we always consider rotations whose axis is the (affine) subspace $C = H_1 \cap H_2$ of dimension $n - 2$, so we avoid to explicitly mention rotation axes, hereafter. Note that such rotations are uniquely identified by their amount (angle) of rotation, which is the one degree of freedom. Formally, define the result of a *rotation* of a halfspace H_1^+ towards a halfspace H_2^+ of an angle $-\pi < \alpha < \pi$ to be the halfspace H_3^+ such that $\delta(H_3^+, H_2^+) = \delta(H_1^+, H_2^+) - \alpha$, and $H_i \cap H_j = C$, $\forall i, j \in \{1, 2, 3\}$, $i \neq j$ (the points on the axis C of rotation are fixed).

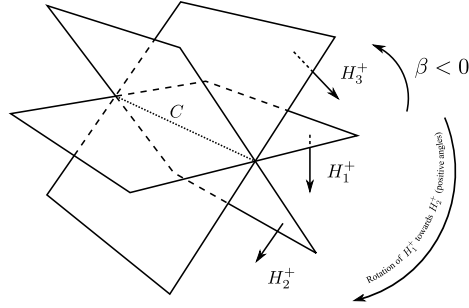


Figure 3: Rotations of halfspaces in Lemma 4.5.

A set $F \subseteq P$ is a *face* of P if either $F = \emptyset$, or $F = P$, or if there exists a supporting hyperplane H_F of P such that F is their touching set, i.e., $F = H_F \cap P$. In the latter case, we say that F is a *proper face* of P . A *facet* of P is a proper face of P having the largest possible dimension, that is, whose dimension is $\dim(P) - 1$.

The following facts are well known [21]:

1. For any facet F of P , there is a halfspace $H^+ \in \mathcal{S}$ such that $F = H^+ \cap P$. We say that H^+ *generates* F .
2. For any proper face F of P , there is a facet F' of P such that $F \subseteq F'$.
3. If F and F' are two proper faces of P and $F \subset F'$, then $\dim(F) < \dim(F')$.

4.0.2. Separating Polyhedra from a Few Supporting Halfspaces

We start with a pair of technical results. With a little abuse of notation, since coalitions correspond to the inequalities (1) and hence with the associated halfspaces of $\mathbb{R}^n$, we use hereafter interchangeably these terms.

Lemma 4.5 (Roof Lemma). *Let H_1^+ , H_2^+ , and H_3^+ be three halfspaces such that $H_i \cap H_j = C \neq \emptyset$, $\forall i, j \in \{1, 2, 3\}$, $i \neq j$, and such that H_3^+ may be obtained by rotating H_1^+ towards H_2^+ by $\beta < 0$, with $\delta(H_2^+, H_1^+) - \beta < \pi$. Then, H_1^+ is a supporting halfspace for $H_2^+ \cap H_3^+$, i.e., for $\text{Pol}(\{H_2^+, H_3^+\})$.*

Proof. Note that H_2^+ may be obtained by rotating H_1^+ towards H_2^+ by their dihedral angle $0 < \alpha = \delta(H_2^+, H_1^+) < \pi$. Thus, all points A of $H_1 \setminus C$ that belong to H_2^+ are in H_3^- , because H_3 is obtained by rotating those points (in the opposite direction) by the angle $\beta < 0$. Symmetrically, all points B of $H_1 \setminus C$ belonging to H_3^+ are in H_2^- , see Figure 3, for a three-dimensional illustration. Moreover, observe that all points in $H_1 \setminus C$ are involved in the rotations and thus belong to either A or B . It follows that $(H_1 \setminus C) \cap (H_2^+ \cap H_3^+) = \emptyset$, whence H_1 is a supporting hyperplane. Finally, since $\delta(H_2^+, H_1^+) - \beta < \pi$, it is easy to see that some point in $H_2^+ \cap H_3^+$ is in H_1^+ , and thus H_1^+ is in fact a supporting halfspace for $\text{Pol}(\{H_2^+, H_3^+\})$. $\square$

We next show that, whenever a full-dimensional polyhedron $P = \text{Pol}(\mathcal{S})$ of $\mathbb{R}^n$ is separated from some hyperplane H_P , there exists a subset of at most n

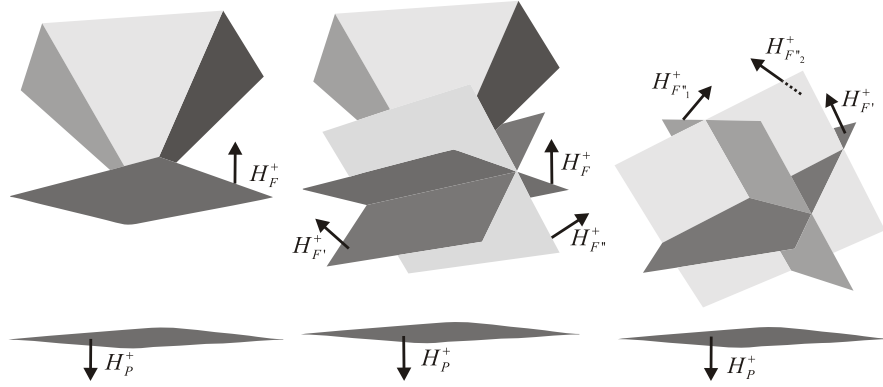


Figure 4: Construction of a certificate of emptiness for the core.

halfspaces corresponding to facets of P that define a larger polyhedron of $\mathbb{R}^n$ (a rough approximation of P), which is still separated from H_P . We first give the proof idea, with the help of Figure 4. For the sake of intuition, imagine that H_P^+ is the inequality (2) associated with the grand-coalition, while the set $\mathcal{S}$ corresponds to the other inequalities (1), whence in this case the core is empty. If there is a facet F of P that is parallel to H_P , we are trivially done, because its associated halfspace already provides the desired separated polyhedron, succinctly described by just one inequality. Otherwise such a face F has a smaller dimension but, from Fact 2, there exists a facet F' of P such that $F \subset F'$. In the three-dimensional example shown in Figure 4, F is the vertex at the bottom of the diamond, H_F^+ is the halfspace (anti-)parallel to H_P that contains F (but it is not associated with any inequality generating P), and F' is some facet on its “dark side.” Let $C = H_F \cap H_{F'}$, and consider the rotation of $H_{F'}^+$ towards H_F^+ of a negative angle β (we go on the opposite direction w.r.t. $H_{F'}^+$) that first touches P , say $H_{F''}^+$. As illustrated in Figure 4, where the face F'' is an edge of the diamond, F'' properly includes F and its dimension is at least $d > \dim(F)$. From the above lemma, $H_{F''}^+$ is a supporting halfspace of the polyhedron $\text{Pol}(H_{F'}^+, H_{F''}^+)$, called its roof, which contains P and is separated from H_P . However, we are not satisfied because we would like that such a polyhedron is described by (at most n) halfspaces *taken from* $\mathcal{S}$, and $H_{F''}^+$ does not belong to $\mathcal{S}$, in general (as in our example, where it does not generate a facet of P). Then, we proceed inductively, by observing that $H_{F''}^+$ is a supporting halfspace for $\text{Pol}(H_{F''_1}^+, H_{F''_2}^+)$ —its roof, whose faces have higher dimension than F'' . In the running example, they are both facets of the diamond, and hence the property immediately holds. In general, the procedure may continue, encountering each time at least one facet and one more face with a higher dimension than the current one. The formal proof follows.

Lemma 4.6. *Let $P = \text{Pol}(\mathcal{S})$ be a polyhedron of $\mathbb{R}^n$ with $\dim(P) = n$, and H_F^+ a supporting halfspace of P whose touching set is F . Then, there exists a set of halfspaces $\mathcal{H}_F \subseteq \mathcal{S}$ such that $|\mathcal{H}_F| \leq n - \dim(F)$, H_F^+ is a supporting halfspace*

of $\text{Pol}(\mathcal{H}_F)$, and their touching set C is such that $F \subseteq C$.

Proof. The proof is by induction. *Base case:* If $\dim(F) = n - 1$ we have that the touching face $F = H_F^+ \cap P$ is a facet of P . Thus, from Fact 1, F is generated by some halfspace $H^+ \subseteq \mathcal{S}$ such that $H^+ \cap P = F$, as for H_F . Since $\dim(F) = \dim(H) = \dim(H_F) = n - 1$, it easily follows that in fact $H = H_F$ holds. Thus, H_F^+ is trivially a supporting halfspace of H^+ , and this case is proved: just take $\mathcal{H}_F = \{H^+\}$ and note that $|\mathcal{H}_F| = 1$.

Inductive step: By the induction hypothesis, the property holds for any supporting halfspace $H_{F'}^+$ of P such that its touching face F' has a dimension $d \leq \dim(F') \leq n - 1$, for some $d > 0$. We show that it also holds for any supporting halfspace H_F^+ of P , whose touching face F has a dimension $\dim(F) = d - 1$.

Since F is not a facet, from Fact 2 there exists a facet F' of P such that $F \subset F'$. Let $C = H_F \cap H_{F'}$, where $H_{F'}^+ \in \mathcal{S}$ is the halfspace that generates the facet F' . Note that $F \subseteq C$. Let $H_{F''}^+$ be the halfspace that first touches the polyhedron P obtained by rotating H_F^+ towards $H_{F'}^+$ by some negative angle β (i.e., we are going in the opposite direction w.r.t. $H_{F'}^+$). Then, $H_{F''}^+$ is a supporting halfspace of P , and the touching set F'' includes C . Since $\dim(P) = n$, we have that $\delta(H_F^+, H_{F'}^+) - \beta < \pi$ and $F \subset F''$ (as the latter face contains some point of the polyhedron outside the axis $C \supseteq F$), and thus the dimension $\dim(F'')$ of this face is strictly greater than $\dim(F)$, from Fact 3. Moreover, From Lemma 4.5, H_F^+ is a supporting halfspace of $\text{Pol}(H_{F'}^+, H_{F''}^+)$, with $C = H_{F'} \cap H_{F''}$ as touching set.

By the induction hypothesis, since both $\dim(F')$ and $\dim(F'')$ are at least d , we know that there are two sets $\mathcal{H}_{F'} \subseteq \mathcal{S}$ and $\mathcal{H}_{F''} \subseteq \mathcal{S}$ such that: $H_{F'}^+$ is a supporting halfspace of $\text{Pol}(\mathcal{H}_{F'})$, with $F' \subseteq C'$, where C' is their touching set; and $H_{F''}^+$ is a supporting halfspace of $\text{Pol}(\mathcal{H}_{F''})$, with $F'' \subseteq C''$, where C'' is their touching set. In particular, $\text{Pol}(\mathcal{H}_{F'}) \subseteq H_{F'}^+$ and $\text{Pol}(\mathcal{H}_{F''}) \subseteq H_{F''}^+$, respectively. Let $\mathcal{H}_F = \mathcal{H}_{F'} \cup \mathcal{H}_{F''}$. Then, we get $\text{Pol}(\mathcal{H}_F) \subseteq \text{Pol}(\{H_{F'}^+, H_{F''}^+\}) \subseteq H_F^+$.

Recall that $F \subseteq C$. Moreover, $F \subset F'$ and $F \subset F''$, and thus $F \subseteq (F' \cap F'') \subseteq (C' \cap C'')$, since $F' \subseteq C'$ and $F'' \subseteq C''$. It follows that the touching set of H_F^+ and $\text{Pol}(\mathcal{H}_F)$ includes F . Indeed, this touching set includes $(C' \cap C'') \cap H_F \supseteq (C' \cap C'') \cap (H_F \cap H_{F'} \cap H_{F''}) = (C' \cap C'') \cap C$, and from the above observations $(C' \cap C'') \cap C \supseteq F$.

Finally, note that $|\mathcal{H}_F| \leq |\mathcal{H}_{F'}| + |\mathcal{H}_{F''}| = 1 + |\mathcal{H}_{F''}|$, because $\dim(F') = n - 1$ and the base case applies. Moreover, $\dim(F'') > \dim(F) = d - 1$ and thus, by the induction hypothesis, we obtain $|\mathcal{H}_F| \leq 1 + n - \dim(F'') \leq 1 + n - d = n - \dim(F)$. $\square$

Let $\mathcal{G} = \langle N, v \rangle$ be a game with transferable payoffs. A coalition set $\mathcal{S} \subseteq 2^N$ is a *certificate of emptiness* (or *infeasibility certificate*) for the core of $\mathcal{G}$ if the intersection of $\text{Pol}(\mathcal{S})$ with the grand-coalition halfspace (2) is empty. In fact, this definition is motivated by the following observation. Let P be the polyhedron of $\mathbb{R}^n$ obtained as the intersection of all halfspaces (1). Since $\mathcal{S}$ is a subset of all possible coalitions, $P \subseteq \text{Pol}(\mathcal{S})$. Therefore, if the intersection of

$\text{Pol}(\mathcal{S})$ with the grand-coalition halfspace (2) is empty, the intersection of this halfspace with P is empty, as well.

Theorem 4.7. *Let $\mathcal{G} = \langle N, v \rangle$ be a game with transferable payoffs. If the core of $\mathcal{G}$ is empty, there is a certificate of emptiness $\mathcal{S}$ for it such that $|\mathcal{S}| \leq |N|$.*

Proof. Let $n = |N|$ and P be the polyhedron of $\mathbb{R}^n$ obtained as the intersection of all halfspaces (1). Since we are not considering the feasibility constraint (2), there is no upper-bound on the values of any variable x_i , and thus it is easy to see that $P \neq \emptyset$ and $\dim(P) = n$.

Let H_P^+ be the halfspace defined by the grand-coalition inequality (2). If the core of $\mathcal{G}$ is empty, the whole set of inequalities has no solution, that is, $P \cap H_P^+ = \emptyset$.

Let $\bar{H}_F^+$ be the halfspace parallel to H_P^+ that first touches P , that is, the smallest relaxation of H_P^+ that intersect P . Consider the opposite H_F^+ of $\bar{H}_F^+$, as shown in Figure 4, on the left. By construction, $H_P^+ \cap H_F^+ = \emptyset$, $H_F = \bar{H}_F$ is a supporting hyperplane of P , and H_F^+ is a supporting halfspace of P . Let F be the touching set of H_F with P , and let $d = \dim(F)$. In Figure 4, it is the vertex at the bottom of the diamond P . From Lemma 4.6, there is a set of halfspaces $\mathcal{S}$ associated with inequalities from (1), with $|\mathcal{S}| \leq n - d$, and such that H_F^+ is a supporting halfspace for $\text{Pol}(\mathcal{S})$. It follows that $H_P^+ \cap \text{Pol}(\mathcal{S}) = \emptyset$, whence $\mathcal{S}$ is a certificate of emptiness for the core of $\mathcal{G}$. Finally, note that the largest cardinality of $\mathcal{S}$ is n , and corresponds to the case $\dim(F) = 0$, that is, to the case where the face F is just a vertex. Therefore the maximum cardinality of the certificate is n . In our three-dimensional example, the certificate is $\{H_{F'}^+, H_{F_1''}^+, H_{F_2''}^+\}$, as shown in Figure 4, on the right. $\square$

Note that the above proof is constructive and has a nice geometrical interpretation. Exploiting the above property, we can now determine the complexity of core non-emptiness for any (non-deterministic) polynomial-time compact representation.

Theorem 4.8. *Let $\mathcal{R}$ be a non-deterministic polynomial-time compact representation. On the class $\mathcal{C}(\mathcal{R})$, CORE-NONEMPTINESS is feasible in co-NP.*

Proof. Let $\mathcal{G} = \langle N, v \rangle$ be a game with transferable payoffs in $\mathcal{C}(\mathcal{R})$. If its core is empty, from Theorem 4.7, there is a certificate of emptiness $\mathcal{S}$, with $|\mathcal{S}| \leq n$, where n is the number of players of $\mathcal{G}$. For the sake of presentation, let us briefly sketch the case of a polynomial-time deterministic representation $\mathcal{R}$. In this case, a non-deterministic Turing machine in polynomial time may check that the core is empty by performing the following operations: (i) guess of the set $\mathcal{S}$, i.e., of the coalitions of players corresponding to the halfspaces in $\mathcal{S}$; (ii) computation in deterministic polynomial time of the worth $v^{\mathcal{R}}(\xi^{\mathcal{R}}(\mathcal{G}), S)$, for each $S \in \mathcal{S}$, and for the grand-coalition N ; and (iii) check of the property $\text{Pol}(\mathcal{S}) \cap H_P^+ = \emptyset$, where H_P^+ is the halfspace defined by the grand-coalition inequality (2). Note that the last step is feasible in polynomial time, as we have to solve a system consisting of just $n + 1$ linear inequalities.

The case of a non-deterministic polynomial-time compact representation $\mathcal{R}$ is a simple variation where, at step (ii), for each $S \in \mathcal{S}$, the computation of the worth is an **NPSV** problem, and thus the machine should work as follows: it guesses the value $w = v^{\mathcal{R}}(\xi^{\mathcal{R}}(\mathcal{G}), S)$ and a witness y that $\langle (\xi^{\mathcal{R}}(\mathcal{G}), S), w \rangle \in \text{graph}(v^{\mathcal{R}})$ (which is an **NP** task in this case); then, by exploiting y , it checks in (deterministic) polynomial-time that actually $\langle (\xi^{\mathcal{R}}(\mathcal{G}), S), w \rangle$ belongs to the graph of the worth function $v^{\mathcal{R}}$. $\square$

The above membership result and Proposition 4.3 imply that the non-emptiness problem for the core is co-**NP**-complete for all **NP** representations at least as expressive as the graph games.

Corollary 4.9. *Let $\mathcal{R}$ be any non-deterministic polynomial-time compact representation such that $\mathcal{GG} \preceq_e \mathcal{R}$ (e.g., $\mathcal{R} = \mathcal{MCN}$). On the class $\mathcal{C}(\mathcal{R})$, CORE-NONEMPTINESS is co-**NP**-complete.*

5. The Complexity of the Kernel

The *kernel* is a solution concept introduced by Davis and Maschler [23]. Let us start by recalling its formal definition.

For any pair of players i and j of a coalitional game $\mathcal{G} = \langle N, v \rangle$, we denote by $\mathcal{I}_{i,j}$ the set of all coalitions containing player i but not player j . The *excess* $e(S, x) = v(S) - x(S)$ of the generic coalition S at the imputation $x \in X(\mathcal{G})$ is a measure of the dissatisfaction of S at x . Define the *surplus* $s_{i,j}(x)$ of player i against player j at an imputation x as the value $s_{i,j}(x) = \max_{S \in \mathcal{I}_{i,j}} e(S, x) = \max_{S \in \mathcal{I}_{i,j}} (v(S) - x(S))$.

Definition 5.1. The *kernel* $\mathcal{K}(\mathcal{G})$ of a TU game $\mathcal{G} = \langle N, v \rangle$ is the set:

$$\mathcal{K}(\mathcal{G}) = \{x \in X(\mathcal{G}) \mid s_{i,j}(x) > s_{j,i}(x) \Rightarrow x_j = v(\{j\}), \forall i, j \in N, i \neq j\}. \quad \square$$

Intuitively, the surplus of player i against j at x is the highest payoff that player i can gain (or the minimal amount i can lose, if it is a negative value) without the cooperation of j , by assuming to form coalitions with other players that are satisfied at x ; thus, $s_{i,j}(x)$ is the weight of a possible threat of i against j . In particular, player i has more “bargaining power” than j at x if $s_{i,j}(x) > s_{j,i}(x)$; however, player j is immune to such threat whenever $x_j = v(\{j\})$, since in this case j can obtain $v(\{j\})$ even by operating on her own. We say that player i outweighs player j at x if $s_{i,j}(x) > s_{j,i}(x)$ and $x_j > v(\{j\})$. The kernel is then the set of all imputations where no player outweighs another one.

Example 5.2. Let $\mathcal{G} = \langle N, v \rangle$ be a TU game with $N = \{a, b, c\}$, $v(\{a\}) = v(\{b\}) = v(\{c\}) = 0$, $v(\{a, b\}) = 20$, $v(\{a, c\}) = 30$, $v(\{b, c\}) = 40$, and $v(\{a, b, c\}) = 42$.

It is easily verified that the imputation x such that $x_a = 4$, $x_b = 14$, and $x_c = 24$ is in the kernel of $\mathcal{G}$. Indeed, we note first that every player in N receives in x a payoff strictly greater than what she is able to obtain by acting on her

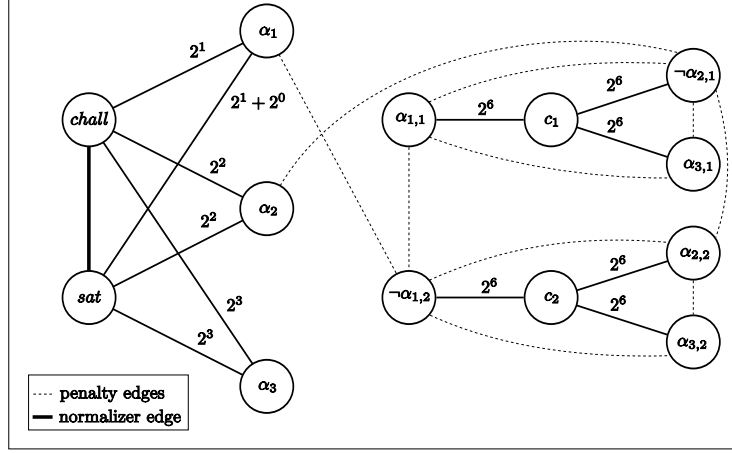


Figure 5: The game $K(\hat{\phi})$, where $\hat{\phi} = (\alpha_1 \vee \neg\alpha_2 \vee \alpha_3) \wedge (\neg\alpha_1 \vee \alpha_2 \vee \alpha_3)$.

own. For this reason, in order for x to belong to $\mathcal{K}(\mathcal{G})$ it must be the case that $s_{i,j}(x) \leq s_{j,i}(x)$, for all distinct players i and j . By the definition of the worth function, the maximum excess that a coalition S including i and excluding j can achieve is obtained by the coalition $S \in \mathcal{I}_{i,j}$ such that $|S| = 2$. By this, $s_{i,j}(x) = s_{j,i}(x) = 2$ for all pairs of different players i, j . Thus, $x \in \mathcal{K}(\mathcal{G})$. $\triangleleft$

It is well known that $\mathcal{K}(\mathcal{G}) \neq \emptyset$, whenever $X(\mathcal{G}) \neq \emptyset$ (see, e.g., [2]). Thus, the non-emptiness problem is trivial for this concept. Instead, as discussed by Deng and Papadimitriou [3], it is of interest to ask for the computational complexity of deciding whether a given payoff vector belongs to the kernel. This problem was conjectured to be **NP**-hard by those same authors [3], even for graph games. In the rest of the section, we firstly confirm the conjecture by actually showing that the problem is even harder and, precisely, Δ_2^P -hard. Then, we shall show that the corresponding membership result holds on any class of games $\mathcal{C}(\mathcal{R})$, where $\mathcal{R}$ is an arbitrary **NP** representation scheme. Finally, we shall single out an island of tractability, by looking for structural restrictions imposed over graph games.

5.1. Hardness on Graph Games

We show that checking whether an imputation belongs to the kernel is Δ_2^P -hard on graph games. The proof is based on a reduction from the problem of the lexicographically maximum satisfying assignment for Boolean formulae.

Let $\phi = c_1 \wedge \dots \wedge c_m$ be a **3CNF** Boolean formula, that is, a Boolean formula in conjunctive normal form over the set $\{\alpha_1, \dots, \alpha_n\}$ of variables that are lexicographically ordered (according to their indices) where each clause contains three literals (positive or negated variables) at most. Assume, w.l.o.g., that there is a clause in ϕ containing at least two literals. Based on ϕ , we build in polynomial time the weighted graph $K(\phi) = \langle (N_K, E_K), w \rangle$ such that (see Figure 5 for an illustration):

- The set $N_{\mathbf{K}}$ of nodes (i.e, players) includes: a *variable player* α_i , for each variable α_i in ϕ ; a *clause player* c_j , for each clause c_j in ϕ ; a *literal player* $\ell_{i,j}$ (either $\ell_{i,j} = \alpha_{i,j}$ or $\ell_{i,j} = \neg\alpha_{i,j}$), for each literal ℓ_i ($\ell_i = \alpha_i$ or $\ell_i = \neg\alpha_i$, respectively) occurring in c_j ; and, two special players “*chall*” and “*sat*”.
- The set $E_{\mathbf{K}}$ consists of the following three types of edges.
 - (**Positive edges**): an edge $\{c_j, \ell_{i,j}\}$ with $w(\{c_j, \ell_{i,j}\}) = 2^{n+3}$, for each literal ℓ_i occurring in c_j ; an edge $\{chall, \alpha_i\}$ with $w(\{chall, \alpha_i\}) = 2^i$, for each $1 \leq i \leq n$; an edge $\{sat, \alpha_i\}$ with $w(\{sat, \alpha_i\}) = 2^i$, for each $2 \leq i \leq n$; the edge $\{sat, \alpha_1\}$ with $w(\{sat, \alpha_1\}) = 2^1 + 2^0$.
 - (**“Penalty” edges**): an edge $\{\ell_{i,j}, \ell_{i',j}\}$ with $w(\{\ell_{i,j}, \ell_{i',j}\}) = -2^{m+n+7}$, for each pair of literals ℓ_i and $\ell_{i'}$ occurring in c_j ; an edge $\{\alpha_{i,j}, \neg\alpha_{i,j'}\}$ with $w(\{\alpha_{i,j}, \neg\alpha_{i,j'}\}) = -2^{m+n+7}$, for each variable α_i occurring positively in c_j and negated in $c_{j'}$; an edge $\{\alpha_i, \neg\alpha_{i,j}\}$ with $w(\{\alpha_i, \neg\alpha_{i,j}\}) = -2^{m+n+7}$, for each variable α_i occurring negated in c_j .
 - (**“Normalizer” edge**): the edge $\{chall, sat\}$, for which we set $w(\{chall, sat\}) = 1 - \sum_{e \in E_{\mathbf{K}} | e \neq \{chall, sat\}} w(e)$.

Note that the size of the representation of all the weights is polynomial in the number of variables and clauses of ϕ . Two crucial properties of the above construction are stated in the following lemma.

Lemma 5.3. *Let $\mathbf{K}(\phi) = \langle (N_{\mathbf{K}}, E_{\mathbf{K}}), w \rangle$ be the graph game associated with the 3CNF formula ϕ . Then:*

- (A) $w(\{chall, sat\}) \geq D + 1$; and,
- (B) $D + w(e) < 0$, for each penalty edge $e \in E_{\mathbf{K}}$,

where $D = \max_{\{chall, sat\} \not\subseteq S \subseteq N} v(S)$ denotes the maximum worth over all the coalitions not covering the edge $\{chall, sat\}$.

Proof. Let $P = \sum_{e \in E_{\mathbf{K}} | e \neq \{chall, sat\}, w(e) > 0} w(e)$ be the sum of all the positive edges, but the normalizer one, in $\mathbf{K}(\phi)$. Let us firstly observe that:

$$P \leq 3 \times m \times 2^{n+3} + 2 \times \sum_{i=1}^n 2^i + 2^0 \leq 2^{m+n+5} + 2^{n+2} + 2^0 \leq 2^{m+n+6}.$$

Thus, $2^{m+n+7} \geq 2 \times P$ holds. Moreover, observe that $\mathbf{K}(\phi)$ contains at least one penalty edge, since w.l.o.g. there is a clause in ϕ containing at least two literals. Hence, $w(\{chall, sat\}) = 1 - \sum_{e \in E_{\mathbf{K}} | e \neq \{chall, sat\}} w(e) \geq 1 - P + 2^{m+n+7}$. It follows that $w(\{chall, sat\}) \geq 1 - P + 2 \times P = 1 + P$. Eventually, $P \geq D$ holds by definition of D and, therefore, $w(\{chall, sat\}) \geq 1 + D$, which proves (A).

As for (B), given that $D > 0$ and $P \geq D$, we may note that $2^{m+n+7} \geq 2 \times P$ implies $2^{m+n+7} > D$. $\square$

Based on the above properties, we can now prove the main result.

Theorem 5.4. *On the class $\mathcal{C}(\mathcal{GG})$ of graph games, KERNEL-CHECK is Δ_2^P -hard (even if the given payoff vector is an imputation).*

Proof. Let $\phi = c_1 \wedge \dots \wedge c_m$ be a satisfiable **3CNF** formula over a set $\{\alpha_1, \dots, \alpha_n\}$ of variables that are lexicographically ordered (according to their indices). Deciding whether α_1 (that is the lexicographically least significant variable) is true in the *lexicographically maximum satisfying assignment* for ϕ is a well-known Δ_2^P -complete problem [24].

Consider the graph game $\mathbf{K}(\phi) = \langle (N_{\mathbf{K}}, E_{\mathbf{K}}), w \rangle$, and the imputation x that assigns 0 to all players of $\mathbf{K}(\phi)$, but to sat , which receives 1. In fact, x is an imputation since $v(N) = 1$ because of the weight of the edge $\{chall, sat\}$ (recall that $w(\{chall, sat\}) = 1 - \sum_{e \in E_{\mathbf{K}} | e \neq \{chall, sat\}} w(e)$).

Beforehand, observe that, by Definition 5.1 and since sat is the only player that receives in x a payoff strictly greater than her worth as a singleton coalition, $x \in \mathcal{K}(\mathbf{K}(\phi))$ if and only if $\max_{S \in \mathcal{I}_{i,sat}} e(S, x) \leq \max_{S \in \mathcal{I}_{sat,i}} e(S, x)$, for each player $i \neq sat$. The following property further restricts the coalitions of interest and, indeed, suffices to conclude that $x \in \mathcal{K}(\mathbf{K}(\phi))$ if and only if

$$\max_{S \in \mathcal{I}_{chall,sat}} e(S, x) \leq \max_{S \in \mathcal{I}_{sat,chall}} e(S, x). \quad (3)$$

Property 5.4.(1): *For each player $i \notin \{sat, chall\}$, it holds that $\max_{S \in \mathcal{I}_{i,sat}} e(S, x) \leq \max_{S \in \mathcal{I}_{sat,i}} e(S, x)$.*

Let S be an arbitrary coalition in $\mathcal{I}_{i,sat}$ with $i \neq chall$, and consider the coalition $T = \{chall, sat\} \in \mathcal{I}_{sat,i}$. Note that $e(T, x) = v(T) - x(T) = v(\{chall, sat\}) - 1$ while $e(S, x) = v(S)$. By Lemma 5.3.(A), we know that $v(\{chall, sat\}) \geq v(S) + 1$. Thus, $e(T, x) \geq e(S, x)$ holds for all coalitions $S \in \mathcal{I}_{i,sat}$ with $i \neq chall$.

Now, we are going to characterize the structure of the two terms $\max_{S \in \mathcal{I}_{chall,sat}} e(S, x)$ and $\max_{S \in \mathcal{I}_{sat,chall}} e(S, x)$ occurring in Equation (3) by establishing a connection with satisfying assignments for ϕ . In particular, for any truth assignment σ , we denote by $\sigma \models \phi$ the fact that σ satisfies ϕ , and by $\sigma(\alpha_i) = \mathbf{true}$ (resp., $\sigma(\alpha_i) = \mathbf{false}$) the fact that α_i evaluates to true (resp., false) in σ .

Property 5.4.(2): $\max_{S \in \mathcal{I}_{chall,sat}} e(S, x) = m \times 2^{n+3} + \max_{\sigma \models \phi} \sum_{\alpha_i | \sigma(\alpha_i) = \mathbf{true}} 2^i$.

Let us firstly note that $\max_{S \in \mathcal{I}_{chall,sat}} e(S, x) = \max_{S \in \mathcal{I}_{chall,sat}} v(S)$, by construction of the imputation x . Let S_* be the coalition having maximum worth over all the coalitions in $\mathcal{I}_{chall,sat}$. Because of Lemma 5.3.(B) and since $v(\{chall\}) = 0$, S_* cannot cover any penalty edge, for otherwise S_* would not be a coalition with maximum worth amongst those belonging to $\mathcal{I}_{chall,sat}$. Thus, (i) for each variable player $\alpha_i \in S_*$, no literal player of the form $\neg \alpha_{i,j}$ is in S_* ; (ii) for each clause player $c_j \in S_*$, at most one literal player of the form $\ell_{i,j}$ is in S_* ; and, (iii) for each variable α_i , S_* contains no pair of literal players of the form $\alpha_{i,j}$ and $\neg \alpha_{i,j'}$.

It follows that the worth of S_* is such that: $v(S_*) = |C| \times 2^{n+3} + \sum_{\alpha_i \in S_*} 2^i$, where C is the set of the clause players $c_j \in S_*$ for which exactly one literal player $\ell_{i,j}$ is in S_* ; in particular, recall that 2^i is the weight associated with the edge $\{chall, \alpha_i\}$, while 2^{n+3} is the weight associated with each edge of the form $\{c_j, \ell_{i,j}\}$. Now, let, $\hat{\sigma}$ be a truth assignment such that $\hat{\sigma}(\alpha_i) = \mathbf{true}$ (resp., $\hat{\sigma}(\alpha_i) = \mathbf{false}$) if $\alpha_{i,j}$ (resp., $\neg\alpha_{i,j}$) occurs in S_* for some clause c_j . Note that $\hat{\sigma}$ may be a partial assignment, over a set of variables $\hat{\alpha} \subseteq \{\alpha_1, \dots, \alpha_n\}$; however, because of (iii) above, $\hat{\sigma}$ is non-contradictory and satisfies all the clauses whose players are in C . Eventually, since ϕ is satisfiable and since $2^{n+3} > \sum_{i=1}^n 2^i$, because of (ii) S_* will certainly contain all the m clause players (i.e., $\hat{\sigma}$ is a satisfying assignment for ϕ). That is, $v(S_*) = m \times 2^{n+3} + \sum_{\alpha_i \in S_*} 2^i$.

Observe now that if $\alpha_{i,j}$ is in S_* , then α_i is in S_* as well, since this leads to maximize the worth of S_* . Moreover, if $\neg\alpha_{i,j}$ is in S_* , then α_i is not in S_* because of (i). Thus, the assignment σ_{S_*} such that $\sigma_{S_*}(\alpha_i) = \mathbf{true}$ (resp., $\sigma_{S_*}(\alpha_i) = \mathbf{false}$) if α_i occurs (resp., not occurs) in S_* coincides with $\hat{\sigma}$ when restricted over the domain of the variables in $\hat{\alpha}$. Therefore, σ_{S_*} is, in turn, a satisfying assignment, and we have:

$$v(S_*) = m \times 2^{n+3} + \sum_{\alpha_i | \sigma_{S_*}(\alpha_i) = \mathbf{true}} 2^i \leq m \times 2^{n+3} + \max_{\sigma \models \phi} \sum_{\alpha_i | \sigma(\alpha_i) = \mathbf{true}} 2^i.$$

We conclude the proof by showing that the above inequality cannot be strict. Indeed, assume, for the sake of contradiction, that a satisfying assignment $\bar{\sigma}$ exists for ϕ such that $v(S_*) < m \times 2^{n+3} + \sum_{\alpha_i | \bar{\sigma}(\alpha_i) = \mathbf{true}} 2^i$. Based on $\bar{\sigma}$, we can build a coalition $\bar{S}$ such that: (a) $\{chall, c_1, \dots, c_m\} \subseteq \bar{S}$; (b) $\alpha_i \in \bar{S}$, for each α_i such that $\bar{\sigma}(\alpha_i) = \mathbf{true}$; (c) exactly one literal $\ell_{i,j}$ is in $\bar{S}$, for each clause c_j that is satisfied by $\ell_{i,j}$ according to the truth values defined in $\bar{\sigma}$; (d) no further player is in $\bar{S}$.

Given that $\bar{\sigma}$ is a satisfying assignment, no penalty edge is covered by $\bar{S}$. In particular, $v(\bar{S}) = m \times 2^{n+3} + \sum_{\alpha_i \in \bar{S}} 2^i$ and, hence, $v(\bar{S}) = m \times 2^{n+3} + \sum_{\alpha_i | \bar{\sigma}(\alpha_i) = \mathbf{true}} 2^i$. But, this is not possible since we would have a coalition $\bar{S} \in \mathcal{I}_{chall, sat}$ such that $v(\bar{S}) > v(S_*) = \max_{S \in \mathcal{I}_{chall, sat}} v(S)$.

Property 5.4.(3): $\max_{S \in \mathcal{I}_{sat, chall}} e(S, x) = m \times 2^{n+3} + \max_{\sigma \models \phi} (|\{\alpha_1 \mid \sigma(\alpha_1) = \mathbf{true}\}| + \sum_{\alpha_i | \sigma(\alpha_i) = \mathbf{true}} 2^i) - 1$.

The property can be proven precisely along the same line of reasoning as in the proof of Property 5.4.(2). The differences are that: $x(S) = 1$ holds for each S with $sat \in S$; and that the weight associated with the edge $\{sat, \alpha_i\}$ is 2^i , for each $2 \leq i \leq n$, while it is $2^1 + 2^0$ for the case where $i = 1$. In particular, $|\{\alpha_1 \mid \sigma(\alpha_1) = \mathbf{true}\}|$ precisely encodes the fact that an unitary weight has to be added to any assignment where α_1 evaluates to true.

We can now rewrite Equation (3) in the light of the above two properties, and conclude that $x \in \mathcal{K}(\mathbf{K}(\phi))$ if and only if:

$$1 + \max_{\sigma \models \phi} \sum_{\alpha_i | \sigma(\alpha_i) = \text{true}} 2^i \leq \max_{\sigma \models \phi} \left(\sum_{\alpha_i | \sigma(\alpha_i) = \text{true}} 2^i + |\{\alpha_1 \mid \sigma(\alpha_1) = \text{true}\}| \right),$$

that is, $x \in \mathcal{K}(\mathbf{K}(\phi))$ if and only if α_1 is true in the lexicographically maximum satisfying assignment for ϕ . $\square$

By the same argument used in the proof of Proposition 4.3, the above result can be immediately extended to all representations at least as expressive (and succinct) as graph games.

Corollary 5.5. *Let $\mathcal{R}$ be any compact representation such that $\mathcal{GG} \preceq_e \mathcal{R}$ (e.g., $\mathcal{R} = \mathcal{MCN}$). On the class $\mathcal{C}(\mathcal{R})$, KERNEL-CHECK is Δ_2^P -hard.*

5.2. Membership on FNP Representation Schemes

Differently from the hardness result proven above, the corresponding membership result is routine. Anyway, the proof is reported below, for the sake of completeness.

Theorem 5.6. *Let $\mathcal{R}$ be a non-deterministic polynomial-time compact representation. On the class $\mathcal{C}(\mathcal{R})$, KERNEL-CHECK is feasible in Δ_2^P .*

Proof. Let $\mathcal{G} \in \mathcal{C}(\mathcal{R})$ be a coalitional game, and x be a payoff vector. Note first that, in order to check whether x is actually an imputation, we have just to compute the worths associated to all the singleton coalitions plus the worth associated to the whole set of players, which can be done in Δ_2^P —just recall that each worth can be computed in non-deterministic polynomial-time. More in detail, for each player $i \in \{1, \dots, n\}$, we guess in polynomial time the value $w_i = v^{\mathcal{R}}(\xi^{\mathcal{R}}(\mathcal{G}), \{i\})$ and a suitable certificate $c_{\{i\}}$, and then we check in (deterministic) polynomial time that in fact $\langle (\xi^{\mathcal{R}}(\mathcal{G}), \{i\}), w_i \rangle \in \text{graph}(v^{\mathcal{R}})$, exploiting the certificate $c_{\{i\}}$ (see the proof of Theorem 4.8).

Assume now that x is an imputation. Then, we observe that for each pair of players i and j , we can compute the value $s_{i,j}(x)$ by means of a binary search over the range of the possible values for the worth functions, by using an **NP** oracle. Indeed, for any value h in this range, we can decide in **NP** whether there is a coalition $S \in \mathcal{I}_{i,j}$ such that $e(S, x) > h$, by guessing the coalition S , its worth $w = v^{\mathcal{R}}(\xi^{\mathcal{R}}(\mathcal{G}), S)$ together with a (polynomial) certificate c_S , and then by checking in polynomial time that in fact $S \in \mathcal{I}_{i,j}$, that $\langle (\xi^{\mathcal{R}}(\mathcal{G}), S), w \rangle \in \text{graph}(v)$ (by exploiting c_S), and that $e(S, x) > h$, where $e(S, x) = w - x(S)$.

Finally, note that, being $\mathcal{R}$ a non-deterministic polynomial-time compact representation, $v^{\mathcal{R}}(\cdot, \cdot)$ is polynomially balanced, meaning that there exists a fixed integer k such that, for every game $\mathcal{G}$ in $\mathcal{C}(\mathcal{R})$, $\|v^{\mathcal{R}}(\xi^{\mathcal{R}}(\mathcal{G}), S)\| \leq \|\xi^{\mathcal{R}}(\mathcal{G}, S)\|^k$ for every coalition S , and hence the worth value of every coalition

in $\mathcal{G}$ (of every $\mathcal{G} \in \mathcal{C}(\mathcal{R})$) cannot exceed the largest (positive or negative) value representable in the polynomial size $\|\langle \xi^{\mathcal{R}}(\mathcal{G}), S \rangle\|^k$. By this, the above binary search allows us to find the maximum excess in at most polynomially many steps. Therefore, by using polynomially-many oracle calls, we may check in polynomial time that for each pair of distinct players i and j such that $x_j \neq v(\{j\})$, it is the case that $s_{i,j}(x) \leq s_{j,i}(x)$. $\square$

From this result and Corollary 5.5, we immediately get the following completeness result.

Corollary 5.7. *Let $\mathcal{R}$ be any non-deterministic polynomial-time compact representation such that $\mathcal{G}\mathcal{G} \preceq_e \mathcal{R}$ (e.g., $\mathcal{R} = \mathcal{MCN}$). On the class $\mathcal{C}(\mathcal{R})$, KERNEL-CHECK is Δ_2^P -complete.*

5.3. Tractable Classes of Graph Games

Many **NP**-hard problems in different application areas ranging, e.g., from AI [25] and Database Theory [26] to Game theory [27], are known to be efficiently solvable when restricted to instances whose underlying structures can be modeled via *acyclic* graphs or *nearly-acyclic* ones, such as those graphs having *bounded treewidth* [11]. Indeed, on these kinds of instances, solutions can usually be computed via dynamic programming, by incrementally processing the acyclic (hyper)graph, according to some of its topological orderings. In this section, we shall show that this is also the case for the kernel of bounded treewidth graph games.

Our result is established by showing that this concept can be expressed in terms of an optimization problem over *Monadic Second Order Logic (MSO)* formulas, and by subsequently applying Courcelle's Theorem [12] and its generalization to optimization problems due to Arnborg, Lagergren, and Seese [13]. Thus, we first review the concepts of treewidth and MSO, and their relationship as it appears from Courcelle's Theorem.

Treewidth. A *tree decomposition* of a graph $G = (N, E)$ is a pair $\langle T, \chi \rangle$, where $T = (V, F)$ is a tree, and χ is a labeling function assigning to each vertex $p \in V$ a set of vertices $\chi(p) \subseteq N$, such that the following conditions are satisfied:

- (1) for each node b of G , there exists $p \in V$ such that $b \in \chi(p)$;
- (2) for each edge $(b, d) \in E$, there exists $p \in V$ such that $\{b, d\} \subseteq \chi(p)$; and,
- (3) for each node b of G , the set $\{p \in V \mid b \in \chi(p)\}$ induces a connected subtree.

The *width* of $\langle T, \chi \rangle$ is the number $\max_{p \in V} (|\chi(p)| - 1)$. The *treewidth* of G , denoted by $tw(G)$, is the minimum width over all its tree decompositions. It is well-known that a graph G is acyclic if and only if $tw(G) = 1$. Deciding whether a given graph has treewidth bounded by a fixed natural number k is known to be feasible in linear time [28].

MSO. Monadic Second Order (MSO) logic formulae over graphs are made up of the logical connectors $\vee$, $\wedge$, and $\neg$, the membership relation $\in$, the quantifiers

$\exists$ and $\forall$, vertices variables and vertex sets variables—in addition, it is often convenient to use symbols like $\subseteq$, $\subset$, $\cap$, $\cup$, and $\rightarrow$ with their usual meaning, as abbreviations.

Courcelle [12] and other authors considered an extension of MSO, called MSO_2 , where variables for edge sets are also allowed. The fact that an MSO_2 sentence ϕ holds over a graph G is denoted by $G \models \phi$.

The relationship between treewidth and MSO_2 is illustrated next. For a positive constant k , let hereafter $\mathcal{C}_k$ be a class of graphs having treewidth bounded by k . For a graph $G = (N, E)$, we denote by $\|G\|$ its *size*, which is measured as the number of its nodes plus the number of its edges, i.e., $\|G\| = |N| + |E|$.

Proposition 5.8 (Courcelle’s Theorem [12]). *Let ϕ be a fixed MSO_2 sentence. For each $G \in \mathcal{C}_k$, deciding whether $G \models \phi$ or not is feasible in linear time (w.r.t. $\|G\|$).*

An important generalization of MSO_2 formulae to *optimization* problems was presented by Arnborg et al. [13]. Next, we state a simplified version of these kinds of problems. Optimization problems are defined over MSO_2 formulae containing free variables and over graphs that are weighted on both nodes and edges.

Let $G = \langle (N, E), f_N, f_E \rangle$ be a weighted graph where f_N and f_E are the lists of weights associated with nodes and edges, respectively. Then, $f_N(v)$ (resp., $f_E(e)$) denotes the weight associated with $v \in N$ (resp., $e \in E$). For the weighted graph $G = \langle (N, E), f_N, f_E \rangle$, its size $\|G\|$ is measured as the sum of $|N| + |E|$ plus all values in the lists f_N and f_E . Note that this is equivalent to state that weights are encoded in unary notation and that $\|G\|$ is measured as the sum of $|N| + |E|$ plus all the bits that are necessary to store the lists f_N and f_E .

Let $\phi(X, Y)$ be an MSO_2 formula over the graph (N, E) , where X and Y are the free variables occurring in ϕ , with X (resp., Y) being a vertex (resp., edge) set variable. For a pair of interpretations $\langle z_N, z_E \rangle$ mapping X to subsets of N and Y to subsets of E , we denote by $\phi[\langle z_N, z_E \rangle]$ the MSO_2 formula (without free variables) where X and Y are replaced by the sets $z_N(X)$ and $z_E(Y)$, respectively.

A *solution* to ϕ over G is a pair of interpretations $\langle z_N, z_E \rangle$ such that $(N, E) \models \phi[\langle z_N, z_E \rangle]$ holds. The *cost* of $\langle z_N, z_E \rangle$ is the value $\sum_{x \in z_N(X)} f_N(x) + \sum_{y \in z_E(Y)} f_E(y)$. A solution of minimum cost is said *optimal*.

Theorem 5.9 (simplified from Arnborg et al. [13]). *Let ϕ be a fixed MSO_2 sentence. For each weighted graph $G = \langle (N, E), f_N, f_E \rangle$ such that $(N, E) \in \mathcal{C}_k$, computing an optimal solution to ϕ over G is feasible in (deterministic) polynomial time (w.r.t. $\|G\|$).*

A Tractable Class. Now that we have discussed the preliminary notions and concepts related to treewidth and MSO, we are in the position of stating our tractability result.

Theorem 5.10. *Let $\mathcal{G} = \langle (N, E), w \rangle$ be a graph game such that $(N, E) \in \mathcal{C}_k$, and let x be a payoff vector. Then, deciding whether $x \in \mathcal{X}(\mathcal{G})$ is feasible in polynomial time (w.r.t. $\|G\|$).*

Proof. Since we can check in polynomial time whether x is an imputation, by Definition 5.1 we have just to show that checking whether the condition $s_{i,j}(x) > s_{j,i}(x) \Rightarrow x_j = v(\{j\})$ holds is feasible in polynomial-time. We prove that $s_{i,j}(x)$ may be computed in polynomial time for each pair of players $i \neq j$, which clearly entails the above tractability result.

For each $X \subseteq N$ and $Y \subseteq E$, consider the following MSO₂ formula, stating that Y is the set of all those edges $e \in E$ such that $e \subseteq X$:

$$\begin{aligned} \text{proj}(X, Y) \equiv & \forall v, v' \left(\{v, v'\} \in Y \rightarrow \{v, v'\} \subseteq X \right) \wedge \\ & \forall v, v' \left(\{v, v'\} \subseteq X \wedge \{v, v'\} \in E \rightarrow \{v, v'\} \in Y \right). \end{aligned}$$

Let w_E and w_N be such that $w_E(\{v, v'\}) = -w(\{v, v'\})$ and $w_N(v) = x_v$, and observe that $\max_{S \subseteq N} e(S, x) = -1 * \text{opt}$, where $\text{opt} = \min_{S \subseteq N} (x(S) - v(S))$ is the cost of an optimal solution to $\text{proj}(X, Y)$ over $\langle (N, E), w_N, w_E \rangle$.

Recall, now, that $s_{i,j}(x) = \max_{S \in \mathcal{I}_{i,j}} e(S, x)$. Therefore, in order to exploit the above MSO formula for its computation, we have to make sure that the set of considered coalitions is restricted to $\mathcal{I}_{i,j}$. We thus modify the weights of i and j in $\mathcal{G}$ so that, in any optimal solution of the above formula, $i \in X$ and $j \notin X$, and thus $\max_{S \subseteq N} e(S, x)$ coincides with $s_{i,j}$. Let $B = \max_{e \in E} \text{abs}(w_E(e))$ be the largest weight (in absolute value) among all edges of the graph. Then, replace the weights for nodes i and j as follows: $w_N(i) = -1 - |\{e \in E \mid i \in e\}| * B$ and $w_N(j) = 1 + |\{e \in E \mid j \in e\}| * B$. It is straightforward to check that any optimal solution for this modified graph is attained at some set S that includes i and does not include j . From its value, say opt' , we may easily compute the desired value $s_{i,j}(x)$ as $-1 * (\text{opt}' + x_i - w_N(i))$.

Hence, by Theorem 5.9 and the above MSO₂ formula, $s_{i,j}$ is computable in polynomial time, and thus the membership of x in $\mathcal{X}(\mathcal{G})$ can be decided in polynomial time, too. $\square$

6. The Complexity of the Bargaining Set

The concept of bargaining set was defined by Aumann and Maschler [29] (see also Maschler [30]). We start by recalling its formal definition.

Let $\mathcal{G} = \langle N, v \rangle$ be a coalitional game, and $x \in X(\mathcal{G})$ be an imputation. Let $S \subseteq N$ be a coalition, and y be an S -feasible payoff vector (i.e., $y(S) = v(S)$). The pair (y, S) is an *objection of player i against player j to x* if $i \in S$, $j \notin S$, and $y_k > x_k$ for all $k \in S$.

A *counterobjection to the objection (y, S) of i against j to x* is a pair (z, T) where $j \in T$, $i \notin T$, and z is a T -feasible payoff vector such that $z_k \geq x_k$ for all $k \in T \setminus S$ and $z_k \geq y_k$ for all $k \in T \cap S$. If there does not exist any counterobjection to (y, S) , we say that (y, S) is a *justified objection*.

Definition 6.1. The *bargaining set* $\mathcal{B}(\mathcal{G})$ of a TU game $\mathcal{G}$ is the set of all imputations x to which there is no justified objection. $\square$

Example 6.2. Let $\mathcal{G} = \langle N, v \rangle$ be a TU game with $N = \{a, b, c\}$, $v(\{a\}) = v(\{b\}) = v(\{c\}) = 0$, $v(\{a, b\}) = 20$, $v(\{a, c\}) = 30$, $v(\{b, c\}) = 40$, and $v(\{a, b, c\}) = 42$.

Consider the imputation x such that $x_a = 8$, $x_b = 10$, and $x_c = 24$. An objection of player c against player a to x is $((12, 28), \{b, c\})$. Player a can counterobject to this objection using $((8, 12), \{a, b\})$. Another objection of player c against player a to x is $((14, 26), \{b, c\})$. In this case, player a cannot counterobject. The reason is that coalition $\{a, b\}$ receives a payoff 20 and this is not sufficient for player a to counterobject since she needs at least 8 for herself and at least 14 for player b , in order to respond to the proposal of player c . Therefore the imputation x does not belong to $\mathcal{B}(\mathcal{G})$. The intuitive reason is that player a receives too much, according to this profile.

Consider now the imputation x' such that $x'_a = 4$, $x'_b = 14$, and $x'_c = 24$. We focus on the objections of player a against player c . We note that, in order to object, player a has to form the coalition $S = \{a, b\}$. The excess $e(S, x)$ of S at x is 2, hence players a and b have the possibility to distribute among themselves a payoff of 2 to make the objection. But player c can always counterobject to player a because she can form the coalition $T = \{b, c\}$ whose excess at x is 2 and hence she can always match the proposal made to player b by player a in order to object. A similar argumentation holds for every objection of every player against any other. Thus $x' \in \mathcal{B}(\mathcal{G})$. $\triangleleft$

It is well-known that $\mathcal{K}(\mathcal{G}) \subseteq \mathcal{B}(\mathcal{G})$ (hence, $\mathcal{B}(\mathcal{G}) \neq \emptyset$, whenever $X(\mathcal{G}) \neq \emptyset$), and that $\mathcal{C}(\mathcal{G}) \subseteq \mathcal{B}(\mathcal{G})$ (see, e.g., [2]). Thus, as in the case of the kernel, we shall just focus on the complexity of deciding whether a given payoff vector is in the bargaining set. The problem was conjectured to be Π_2^P -complete for graph games by Deng and Papadimitriou [3]. In this section, we show that the conjecture is indeed correct. Also, we are able to generalize the result by showing that membership in Π_2^P holds on any class of games $\mathcal{C}(\mathcal{R})$, where $\mathcal{R}$ is an **NP** representation scheme.

6.1. Hardness on Graph Games

It has been suggested by Maschler [30] that computing the bargaining set might be intrinsically more complex than computing the core. The result presented in this section provides some fresh evidence that this is indeed the case inasmuch as we show that the checking whether a payoff vector is in the bargaining set is Π_2^P -hard, even over graph games. The reduction is from the validity of quantified Boolean formulae.

Let $\Phi = (\forall \alpha)(\exists \beta)\phi(\alpha, \beta)$ be an **NQBF**_{2,∇} formula, i.e., a quantified Boolean formula over the variables $\alpha = \{\alpha_1, \dots, \alpha_n\}$ and $\beta = \{\beta_1, \dots, \beta_r\}$, where $\phi(\alpha, \beta) = c_1 \wedge \dots \wedge c_m$ is a **3CNF** formula, and where each universally quantified variable $\alpha_k \in \alpha$ occurs only in the two clauses $c_{i(k)} = (\alpha_k \vee \neg \beta_k)$ and $c_{\bar{i}(k)} = (\neg \alpha_k \vee \beta_k)$ —intuitively, each variable α_k enforces the truth-value of

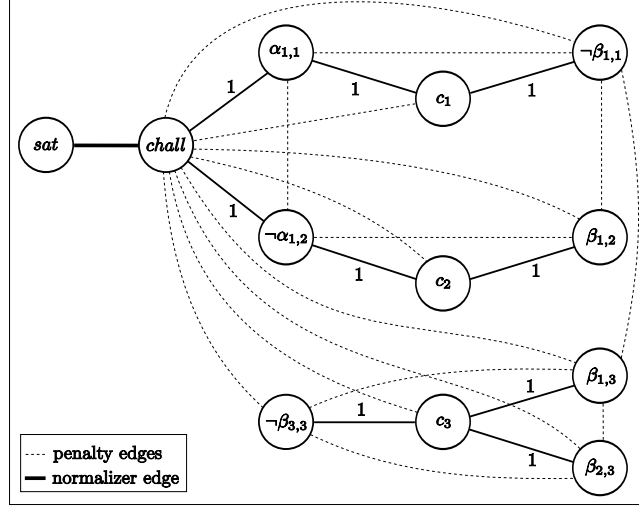


Figure 6: The game $BS(\hat{\Phi})$, where $\hat{\Phi} = (\forall\alpha_1)(\exists\beta_1, \beta_2, \beta_3)(\alpha_1 \vee \neg\beta_1) \wedge (\neg\alpha_1 \vee \beta_1) \wedge (\beta_1 \vee \beta_2 \vee \neg\beta_3)$.

a corresponding variable β_k , which thus plays its role in the formula $\phi(\alpha, \beta)$. Based on Φ , we define the weighted graph $BS(\Phi) = \langle (N_{BS}, E_{BS}), w \rangle$ such that (see Figure 6 for an illustration):

- The set N_{BS} of the nodes (i.e., players) includes: a *clause player* c_j , for each clause c_j ; a *literal player* $\ell_{i,j}$, for each literal ℓ_i occurring in c_j ; and two special players “*chall*” and “*sat*”.
- The set E_{BS} of edges includes three kinds of edges.
 - (**Positive edges**): an edge $\{c_j, \ell_{i,j}\}$ with $w(\{c_j, \ell_{i,j}\}) = 1$, for each literal ℓ_i occurring in the clause c_j ; an edge $\{chall, \ell_{i,j}\}$ with $w(\{chall, \ell_{i,j}\}) = 1$, for each literal ℓ_i of the form α_i or $\neg\alpha_i$ (i.e., built over a universally quantified variable) occurring in c_j .
 - (**“Penalty” edges**): an edge $\{\gamma_{i,j}, \neg\gamma_{i,j'}\}$ with $w(\{\gamma_{i,j}, \neg\gamma_{i,j'}\}) = -m - 1$, for each variable γ_i (either $\gamma_i = \alpha_i$ or $\gamma_i = \beta_i$) occurring in c_j and $c_{j'}$; an edge $\{\ell_{i,j}, \ell_{i',j}\}$ with $w(\ell_{i,j}, \ell_{i',j}) = -m - 1$, for each pair of literals ℓ_i and $\ell_{i'}$ occurring in c_j ; an edge $\{chall, \ell_{i,j}\}$ with $w(\{chall, \ell_{i,j}\}) = -m - 1$, for each literal ℓ_i of the form β_i or $\neg\beta_i$ (i.e., built over an existentially quantified variable) occurring in c_j ; an edge $\{chall, c_j\}$ with $w(\{chall, c_j\}) = -m - 1$, for each clause c_j .
 - (**“Normalizer” edge**): the edge $\{chall, sat\}$ with $w(\{chall, sat\}) = n - 1 + m - \sum_{e \in E_{BS} | e \neq \{chall, sat\}} w(e)$.

Note that the size of the representation of all the weights is polynomial in the number of variables and clauses of Φ . Moreover, the following properties hold.

Lemma 6.3. *Let $\mathbf{BS}(\Phi) = \langle (N_{\mathbf{BS}}, E_{\mathbf{BS}}), w \rangle$ be the graph game associated with the $\mathbf{NQBF}_{2,\forall}$ formula Φ . Then:*

- (A) $D \leq m$;
- (B) $w(\{\text{chall}, \text{sat}\}) > 2 \times m$;
- (C) $D + w(e) < 0$, for each penalty edge $e \in E_{\mathbf{BS}}$; and,
- (D) $m \geq 2 \times n$,

where $D = \max_{\{\text{chall}, \text{sat}\} \not\subseteq S \subseteq N} v(S)$ denotes the maximum worth over all the coalitions not covering the edge $\{\text{chall}, \text{sat}\}$.

Proof. The fact (A) that $D \leq m$ is immediate by construction. Moreover, the weight of each penalty edge is $-m - 1$ and, hence, (C) holds, too. Eventually, (D) (i.e., $m \geq 2 \times n$) is also immediate since Φ is an $\mathbf{NQBF}_{2,\forall}$ formula.

Let us, hence, focus on (B) by observing that $\sum_{e \in E_{\mathbf{BS}} | e \neq \{\text{chall}, \text{sat}\}} w(e) \leq -m - 1$, for $E_{\mathbf{BS}}$ contains more penalty edges than positive ones. Thus, $w(\{\text{chall}, \text{sat}\}) = n - 1 + m - \sum_{e \in E | e \neq \{\text{chall}, \text{sat}\}} w(e) \geq n - 1 + m + (m + 1) > 2 \times m$. $\square$

Theorem 6.4. *On the class $\mathcal{C}(\mathcal{GG})$ of graph games, BARGAININGSET-CHECK is Π_2^P -hard (even if the given payoff vector is an imputation).*

Proof. Deciding the validity of $\mathbf{NQBF}_{2,\forall}$ formulae is Π_2^P -complete [31]. Thus, given an $\mathbf{NQBF}_{2,\forall}$ formula $\Phi = (\forall \alpha)(\exists \beta)\phi(\alpha, \beta)$ (where $\alpha = \{\alpha_1, \dots, \alpha_n\}$, $\beta = \{\beta_1, \dots, \beta_r\}$, and $\phi(\alpha, \beta) = c_1 \wedge \dots \wedge c_m$), consider the graph game $\mathbf{BS}(\Phi) = \langle (N_{\mathbf{BS}}, E_{\mathbf{BS}}), w \rangle$ and the imputation x that assigns m to sat , $n - 1$ to chall , and 0 to all other players. Note that x is an imputation, since $v(N) = m + n - 1$ because of the weight of the edge $\{\text{chall}, \text{sat}\}$ (recall that $w(\{\text{chall}, \text{sat}\}) = m + n - 1 - \sum_{e \in E_{\mathbf{BS}} | e \neq \{\text{chall}, \text{sat}\}} w(e)$).

Beforehand, we note that the following properties hold on $\mathbf{BS}(\Phi)$ and x .

Property 6.4.(1). *No player has a justified objection against a clause or a literal player.*

Indeed, any clause player c_j receives 0 in x and is such that $v(\{c_j\}) = 0$. Therefore, she can counterobject to any objection through the singleton coalition $\{c_j\}$. Similarly, any literal player $\ell_{i,j}$ receives 0 in x and is such that $v(\{\ell_{i,j}\}) = 0$, and can counterobject through $\{\ell_{i,j}\}$.

Property 6.4.(2). *No player has a justified objection against chall .*

Assume that a player $p \in N_{\mathbf{BS}}$ wants to object against chall through a coalition S . If $v(S) < 0$ then p cannot object against anyone. Indeed, she has to propose an S -feasible vector y such that $y_k > x_k$ for all player $k \in S$, and hence $v(S) = y(S) > x(S)$, but $x(S) \geq 0$ by definition, so player p cannot fulfill this requirements if $v(S) < 0$. Then, because of Lemma 6.3.(C), S does not include penalty edges. In particular, for each universally quantified variable α_k , it holds that $|S \cap \{\alpha_{k,i(k)}, \neg \alpha_{k,i(k)}\}| \leq 1$,

where $c_{i(k)}$ and $c_{\bar{i}(k)}$ are the two clauses where this variable occurs (recall that Φ is an $\mathbf{NQBF}_{2,\vee}$ formula).

Consider, then, the coalition $T \subseteq \{chall\} \cup \{\alpha_{k,i(k)}, \neg\alpha_{k,\bar{i}(k)} \mid 1 \leq k \leq n\}$ such that $|T| = n+1$, $T \cap S = \emptyset$, and $|T \cap \{\alpha_{k,i(k)}, \neg\alpha_{k,\bar{i}(k)}\}| = 1$, for each $1 \leq k \leq n$. Note that $v(T) = n$ and $x(T) = x_{chall} = n-1$. Then, consider the vector z such that $z_{chall} = x_{chall} = n-1$ and $z_q = \frac{1}{n} > x_q = 0$ for each $q \in T$ with $q \neq chall$, and observe that $z(T) = v(T)$. Eventually, since $T \cap S = \emptyset$, (z, T) is a counterobjection to any objection of p against $chall$ through S .

Property 6.4.(3). *No player different from $chall$ has a justified objection against sat .*

Suppose that a player $p \neq chall$ has an objection (y, S) against sat to x . Since $sat \notin S$, it is the case that $\{chall, sat\} \not\subseteq S$ and hence, by Lemma 6.3.(A), that $v(S) \leq m$. Then, we claim that $(z, \{sat, chall\})$ is a counterobjection to (y, S) of p against sat , where z is a feasible distribution that assigns m to sat and $w(\{chall, sat\}) - m$ to $chall$. In fact, by Lemma 6.3.(B), $chall$ receives a payoff strictly greater than m (i.e., $z_{chall} > m$). Then, note that $z_{sat} = x_{sat}$ and let us distinguish two cases.

In the case where $chall \notin S$, we have that $z_{chall} > m \geq n-1 = x_{chall}$ (recall that $m \geq 2 \times n$, by Lemma 6.3.(D)). Instead, in the case where $chall \in S$, we have that $z_{chall} > m$ while $y_{chall} \leq v(S) \leq m$, and hence $z_{chall} > y_{chall}$. It follows that in both cases $(z, \{sat, chall\})$ is a counterobjection to (y, S) .

In the light of the properties above, we can limit our attention to the objections of $chall$ against sat . Consider an objection (y, S) of $chall$ against sat to x . In particular, y_{chall} must be greater than $x_{chall} = n-1$ and $y_q > 0 = x_q$ for each $q \in S$ with $q \neq chall$. Thus, $y(S) = v(S) > n-1$.

Then, because of Lemma 6.3.(C), in order for such a coalition S to be such that $v(S) > n-1$, no penalty edge must be covered by S . Moreover, given that $chall \in S$, we have that S must contain exactly one player per universally quantified variable so that $v(S) = n > n-1$, i.e., $|S| = n+1$ and $|S \cap \{\alpha_{k,i(k)}, \neg\alpha_{k,\bar{i}(k)}\}| = 1$, for each $1 \leq k \leq n$. By this, the objection y has to be a vector such that $y(S) = n$, $y_{chall} > n-1$, and $y_q > 0$, for each $q \in S$ with $q \neq chall$. Note that the coalition S encodes an assignment σ_S for the variables in α such that α_k evaluates to false (resp., true) in σ_S if $\alpha_{k,i(k)}$ (resp., $\neg\alpha_{k,\bar{i}(k)}$) occurs in S —note that in this correspondence the truth values are inverted with respect to the membership of the corresponding literal players in S .

Moreover, note that for each truth assignment σ for the variables in α , we may immediately build a coalition S and a vector y such that (y, S) is an objection of $chall$ against sat , and $\sigma_S = \sigma$. Therefore, objections of $chall$ against sat are in correspondence with truth assignments for universally quantified variables.

We are now ready to show that Φ is valid if and only if x is in $\mathcal{B}(\mathbf{BS}(\Phi))$:

($\Rightarrow$) Assume that $\Phi = (\forall\alpha)(\exists\beta)\phi(\alpha, \beta)$ is valid, and let (y, S) be any objection of *chall* against *sat* to x . We show that this objection is not justified, because *sat* has a counterobjection (z, T) . Recall first that S encodes an assignment σ_S over the variables in α . Then, let σ be a satisfying assignment over the variables in Φ such that α_k evaluates to true in σ if and only if it evaluates to true in σ_S ; indeed, such a satisfying assignment σ exists since Φ is valid. Based on σ , let us construct the coalition T such that $T \subseteq \{sat\} \cup \{\ell_{i,j} \mid \ell_i \text{ evaluates to true in } \sigma \wedge c_j \text{ is a clause where } \ell_i \text{ occurs}\} \cup \{c_1, \dots, c_m\}$, $T \cap S = \emptyset$, $|T| = 2m + 1$, and $v(T) = m$. In particular, T can be such that $v(T) = m$, precisely because σ is a satisfying assignment and by construction of σ_S . Moreover, consider the vector z such that $z_{sat} = v(T) = x_{sat} = m$ and $z_q = x_q = 0$ for each $q \in T$ with $q \neq sat$ (and, hence, $q \notin S$). By construction (z, T) is a counterobjection to (y, S) , which is therefore not justified in its turn.

($\Leftarrow$) Let σ be an assignment over the variables in α witnessing that Φ is not valid. Let (y, S) be an arbitrary objection of *chall* against *sat* to x such that $\sigma_S = \sigma$. We claim that (y, S) is justified. Indeed, assume for the sake of contradiction that (y, S) is not justified and let (z, T) be a counterobjection. Since $sat \in T \setminus S$ and since we must have $z_{sat} \geq x_{sat} = m$, because of Lemma 6.3.(A) we actually have that $z_{sat} = x_{sat}$. In fact, since m is the maximum available payoff over all the coalitions not including both *chall* and *sat*, $z(T) = v(T) = m$ and the fact that (z, T) is a counterobjection to (y, S) together entail that $S \cap T = \emptyset$. Also, these entail that T contains all clause players, exactly one literal player per clause, so that $|T| = 2m + 1$. Observe now that T encodes a satisfying truth value assignment σ_T for $\phi(\alpha, \beta)$, because $v(T) > 0$ and hence T does not cover any penalty edge. More precisely, we let each variable γ_i (either $\gamma_i = \alpha_i$ or $\gamma_i = \beta_i$) to evaluate true (resp., false) in σ_T if $\gamma_{i,j}$ (resp., $\neg\gamma_{i,j}$) occurs in T , for some clause c_j . Let σ_T^α denote the restriction of σ_T over the variables in α . Then, since $S \cap T = \emptyset$ and given the definition of σ_S , we have that $\sigma_S = \sigma_T^\alpha$. Clearly, this contradicts the fact that $\sigma = \sigma_S$ witnesses that Φ is not valid. $\square$

Again, by the same argument used for the proof of Proposition 4.3, the above result extends to compact representations more expressive than graph games.

Corollary 6.5. *Let $\mathcal{R}$ be any compact representation such that $\mathcal{GG} \preceq_e \mathcal{R}$ (e.g., $\mathcal{R} = \mathcal{MCN}$). On the class $\mathcal{C}(\mathcal{R})$, BARGAININGSET-CHECK is Π_2^P -hard.*

6.2. Membership on FNP Representation Schemes

As for the result pertaining checking whether a payoff vector belongs to the bargaining set, it has already been argued by Deng and Papadimitriou that this problem is in Π_2^P for graph games [3]. Indeed, they observed that one may decide that an imputation x is not in the bargaining set by firstly guessing in $\mathbf{NP}$ the objection (y, S) , and then by calling a co- $\mathbf{NP}$ oracle, through which to

check that there is no counterobjection (z, T) to (y, S) . However, to apply this argument one typically assumes to consider real values with fixed-precision (or it should be proven that there always exist suitable objections and counterobjections that may be guessed in polynomial-time).

Our main achievement in this section is to show that membership in Π_2^P can be established, *independently of the precision adopted to represent the real values of interest in the game*. To this end, we shall provide a useful characterization of a player i having a justified objection against some player j . The result is in the spirit of one of Maschler [32]’s and connects the existence of a justified objection of i against j to some algebraic conditions to hold on coalitions that i and j (may) belong to.

Lemma 6.6. *Let $\mathcal{G}$ be a coalitional game, and let x be an imputation of $\mathcal{G}$. Then, player i has a justified objection against player j to x through coalition $S \in \mathcal{I}_{i,j}$ if and only if there exists a vector $y \in \mathbb{R}^S$ such that:*

- (1) $y(S) = v(S)$;
- (2) $y_k > x_k$, for each $k \in S$; and,
- (3) $v(T) < y(T \cap S) + x(T \setminus S)$, for each $T \in \mathcal{I}_{j,i}$.

Proof.

($\Rightarrow$) Assume that player i has a justified objection against player j to x through coalition $S \in \mathcal{I}_{i,j}$. Let (y, S) be such justified objection and note that, by definition, $y(S) = v(S)$ and $y_k > x_k$ for each $k \in S$ hold. Assume now, for the sake of contradiction, that (3) above does not hold. Let $\bar{T} \in \mathcal{I}_{j,i}$ be such that $v(\bar{T}) \geq y(\bar{T} \cap S) + x(\bar{T} \setminus S)$. Based on $\bar{T}$, let us build a vector $z \in \mathbb{R}^{\bar{T}}$ such that: (i) $z_k = x_k + \delta$ for each $k \in \bar{T} \setminus S$; and, (ii) $z_k = y_k + \delta$ for each $k \in \bar{T} \cap S$, where

$$\delta = \frac{v(\bar{T}) - y(\bar{T} \cap S) - x(\bar{T} \setminus S)}{|\bar{T}|} \geq 0.$$

Note that $z(\bar{T}) = v(\bar{T})$ holds by construction. Hence, $(z, \bar{T})$ is a counterobjection to (y, S) , a contradiction.

($\Leftarrow$) Assume that there is a vector $y \in \mathbb{R}^S$ such that all the three conditions above hold. Consider the pair (y, S) (with $S \in \mathcal{I}_{i,j}$) and note that due to (1) and (2), (y, S) is in fact an objection of player i against player j . We now claim that (y, S) is justified. Indeed assume, for the sake of contradiction, that a counterobjection $(z, \bar{T})$ (with $\bar{T} \in \mathcal{I}_{j,i}$) exists such that: $z(\bar{T}) = v(\bar{T})$, $z_k \geq x_k$ for each $k \in \bar{T} \setminus S$, and $z_k \geq y_k$ for each $k \in \bar{T} \cap S$. In this case, it holds that $v(\bar{T}) = z(\bar{T}) \geq y(\bar{T} \cap S) + x(\bar{T} \setminus S)$, which contradicts (3). $\square$

Theorem 6.7. *Let $\mathcal{R}$ be a non-deterministic polynomial-time compact representation. On the class $\mathcal{C}(\mathcal{R})$, BARGAININGSET-CHECK is feasible in Π_2^P .*

Proof. Let $\mathcal{G} \in \mathcal{C}(\mathcal{R})$ be a coalitional game, and x be a payoff vector. W.l.o.g., we assume that x is an imputation, since checking this condition is feasible in Π_2^P (see the proof of Theorem 5.6).

Consider the complementary problem of deciding whether $x \notin \mathcal{B}(\mathcal{G})$. We are going to show that this is feasible in Σ_2^P . In the light of Lemma 6.6, $x \notin \mathcal{B}(\mathcal{G})$ if and only if there exist two players i and j , and a coalition $S \in \mathcal{I}_{i,j}$ such that the set

$$\begin{aligned} W(i, j, S) = \{y \in \mathbb{R}^S \mid & y(S) = v^{\mathcal{R}}(\xi^{\mathcal{R}}(\mathcal{G}), S) \wedge \\ & y_k > x_k, \forall k \in S \wedge \\ & v^{\mathcal{R}}(\xi^{\mathcal{R}}(\mathcal{G}), T) < y(T \cap S) + x(T \setminus S), \forall T \in \mathcal{I}_{j,i}\} \end{aligned}$$

is not empty. Thus, the problem can be solved by guessing in **NP** the players i and j and the set $S \in \mathcal{I}_{i,j}$, and then by asking an **NP** oracle to decide whether $W(i, j, S)$ is empty or not. In the latter case, we conclude that $x \notin \mathcal{B}(\mathcal{G})$.

In order to show that this set is empty, the **NP** oracle may proceed as follows: it guesses at most $m \leq |S| + 1$ coalitions $T_1, \dots, T_m \in \mathcal{I}_{j,i}$, plus their worth values $w_1, \dots, w_m$, and the associated certificates to check that actually $\langle (\xi^{\mathcal{R}}(\mathcal{G}), T_\ell), w_\ell \rangle \in \text{graph}(v^{\mathcal{R}})$, $\forall 1 \leq \ell \leq m$. Moreover, it guesses the worth value $v^{\mathcal{R}}(\xi^{\mathcal{R}}(\mathcal{G}), S)$ and a suitable certificate c_S for it. Then, by exploiting these certificates, the oracle checks in (deterministic) polynomial time that all guessed worth values are correct, as well as that the coalitions $T_1, \dots, T_m$ belongs to $\mathcal{I}_{j,i}$ and that S belongs to $\mathcal{I}_{i,j}$. Moreover, it computes the inequalities defined by the first two rows in the above expression, plus the inequalities associated with the guessed coalitions $T_1, \dots, T_m \in \mathcal{I}_{j,i}$. Finally, it checks in (deterministic) polynomial time whether this sub-system of at most $2(|S| + 1) \leq 2n$ inequalities has some solution or not. In the latter case the oracle accepts, that is, it answers that $W(i, j, S) = \emptyset$.

To see that this procedure is correct, note that $W(i, j, S)$ is defined by the intersection of a finite number of convex regions of $\mathbb{R}^S$ and hence, by Proposition 4.4 (Helly's theorem), if $W(i, j, S)$ is empty then there exist a set $\mathcal{E}$ including (at most) $|S| + 1$ of its defining convex regions (here, inequalities) witnessing its emptiness. Therefore, if this is the case, there exists some accepting computation of the oracle where the inequalities associated with the $m \leq |S| + 1$ guessed coalitions plus the $|S| + 1$ inequalities associated with the first two rows of the above expression includes $\mathcal{E}$, and thus the considered sub-system of inequalities has no solutions and it is a (succinct) witness that $W(i, j, S) = \emptyset$. $\square$

From this result and Corollary 6.5, we immediately get the following completeness result.

Corollary 6.8. *Let $\mathcal{R}$ be any non-deterministic polynomial-time compact representation such that $\mathcal{GG} \preceq_e \mathcal{R}$ (e.g., $\mathcal{R} = \mathcal{MCN}$). On the class $\mathcal{C}(\mathcal{R})$, BARGAININGSET-CHECK is Π_2^P -complete.*

7. Conclusions

In this paper, we have provided a complete picture of the complexity issues arising with the notions of core, kernel, and bargaining set on compactly specified coalitional games. On the one hand, we have exhibited membership results that apply to any arbitrary **NP** representation scheme for coalitional games. On the other hand, the corresponding hardness results have been proven on the setting of graph games (which is a very simple **P** representation scheme); hence, these hardness results apply to marginal contribution networks and to any representation scheme that is at least as expressive as graph games. Our results confirmed two conjectures by Deng and Papadimitriou [3], and positively answer an open question posed by Yeung and Shoham [6].

Since the three analyzed solutions concepts turned out to be computationally intractable in general, it is worthwhile looking for natural and expressive enough classes of games where these solutions concepts can be efficiently computed. This question has received only partial answers so far. It has been shown, by Yeung and Shoham [6], that deciding core non-emptiness and deciding whether a payoff vector belongs to the core are problems feasible in polynomial time on classes of marginal contribution networks having bounded treewidth. In this paper, we have further explored this avenue of research, by showing the tractability of the kernel over graph games having bounded treewidth. However, the tractability frontier for such solution concepts is far from being completely charted. In particular, it remains an open problem to establish whether the kernel remains tractable on classes of marginal contribution networks having bounded treewidth, and whether the bounded treewidth is also the key for establishing tractability results when the bargaining set is considered.

References

- [1] J. von Neumann, O. Morgenstern, *Theory of Games and Economic Behavior*, Princeton University Press, Princeton, NJ, USA, 3rd edition, 1953.
- [2] M. J. Osborne, A. Rubinstein, *A Course in Game Theory*, The MIT Press, Cambridge, MA, USA, 1994.
- [3] X. Deng, C. H. Papadimitriou, On the complexity of cooperative solution concepts, *Mathematics of Operations Research* 19 (1994) 257–266.
- [4] H. A. Simon, Theories of bounded rationality, in: C. B. McGuire, R. Radner (Eds.), *Decision and Organization*, volume 12 of *Studies in Mathematical and Managerial Economics*, North-Holland, Amsterdam, The Netherlands, 1972, pp. 161–176.
- [5] E. Kalai, W. Stanford, Finite rationality and interpersonal complexity in repeated games, *Econometrica* 56 (1988) 397–410.

- [6] S. Jeong, Y. Shoham, Marginal contribution nets: a compact representation scheme for coalitional games, in: J. Riedl, M. J. Kearns, M. K. Reiter (Eds.), *Proceedings of the 6th ACM Conference on Electronic Commerce (EC'05)*, Vancouver, BC, Canada, pp. 193–202.
- [7] V. Conitzer, T. Sandholm, Complexity of constructing solutions in the core based on synergies among coalitions, *Artificial Intelligence* 170 (2006) 607–619.
- [8] E. Elkind, L. A. Goldberg, P. W. Goldberg, M. Wooldridge, Computational complexity of weighted threshold games, in: R. C. Holte, A. Howe (Eds.), *Proceedings of the 22nd AAAI Conference on Artificial Intelligence (AAAI-07)*, Vancouver, British Columbia, Canada, pp. 718–723.
- [9] K. Prasad, J. Kelly, Np-completeness of some problems concerning voting games, *International Journal of Game Theory* 19 (1990) 1–9.
- [10] J. M. Bilbao, *Cooperative Games on Combinatorial Structures*, volume 26 of *Theory and Decision Library C*, Kluwer Academic Publishers, Reading, MA, USA, 2000.
- [11] N. Robertson, P. Seymour, Graph minors iii: Planar tree-width, *Journal of Combinatorial Theory, Series B* 36 (1984) 49–64.
- [12] B. Courcelle, Graph rewriting: An algebraic and logic approach, in: J. van Leeuwen (Ed.), *Handbook of Theoretical Computer Science, Volume B: Formal Models and Semantics*, The MIT Press, Cambridge, MA, USA, 1990, pp. 193–242.
- [13] S. Arnborg, J. Lagergren, D. Seese, Easy problems for tree-decomposable graphs, *Journal of Algorithms* 12 (1991) 308–340.
- [14] D. S. Johnson, A catalog of complexity classes, in: J. van Leeuwen (Ed.), *Handbook of Theoretical Computer Science, Volume A: Algorithms and Complexity*, The MIT Press, Cambridge, MA, USA, 1990, pp. 67–161.
- [15] A. L. Selman, A taxonomy of complexity classes of functions, *Journal of Computer and System Sciences* 48 (1994) 357–381.
- [16] E. Elkind, L. A. Goldberg, P. W. Goldberg, M. Wooldridge, A tractable and expressive class of marginal contribution nets and its applications, *Mathematical Logic Quarterly* 55 (2009) 362–376.
- [17] F. Y. Edgeworth, *Mathematical Psychics: An essay on the mathematics to the moral sciences*, C. Kegan Paul & Co., London, 1881.
- [18] D. B. Gillies, Solutions to general non-zero-sum games, in: A. W. Tucker, R. D. Luce (Eds.), *Contributions to the Theory of Games, Volume IV*, volume 40 of *Annals of Mathematics Studies*, Princeton University Press, Princeton, NJ, USA, 1959, pp. 47–85.

- [19] E. Helly, Über mengen konvexer körper mit gemeinschaftlichen punkte, Jahresbericht der Deutschen Mathematiker-Vereinigung 32 (1923) 175–176.
- [20] M. Rabin, A note on helly’s theorem, Pacific Journal of Mathematics 5 (1955) 363–366.
- [21] B. Grünbaum, Convex Polytopes, volume XVI of *Pure and Applied Mathematics*, John Wiley & Sons, New York, NY, USA, 1967.
- [22] A. Brøndsted, An Introduction to Convex Polytopes, volume 90 of *Graduate Texts in Mathematics*, Springer-Verlag, New York, NY, USA, 1983.
- [23] M. Davis, M. Maschler, The kernel of a cooperative game, Naval Research Logistics Quarterly 12 (1965) 223–259.
- [24] M. W. Krentel, The complexity of optimization problems, in: Proceedings of the 18th Annual ACM Symposium on Theory of Computing (STOC’86), Berkeley, CA, USA, pp. 69–76.
- [25] J. Pearson, P. Jeavons, A survey of tractable constraint satisfaction problems, in: CSD-TR-97-15, Royal Holloway, University of London, 1997.
- [26] P. Bernstein, N. Goodman, The power of natural semijoins, SIAM Journal on Computing 10 (1981) 751–771.
- [27] C. Daskalakis, C. Papadimitriou, Computing pure nash equilibria in graphical games via markov random fields, in: Proceedings 7th ACM Conference on Electronic Commerce (EC’06), pp. 91–99.
- [28] H. L. Bodlaender, A linear-time algorithm for finding tree-decompositions of small treewidth, SIAM Journal on Computing 25 (1996) 1305–1317.
- [29] R. J. Aumann, M. Maschler, The bargaining set for cooperative games, in: Advances in Game Theory, Princeton University Press, Princeton, NJ, USA, 1964, pp. 443–476.
- [30] M. Maschler, The bargaining set, kernel, and nucleolus, in: R. J. Aumann, S. Hart (Eds.), Handbook of Game Theory, Volume 1, volume 11 of *Handbooks in Economics*, North-Holland, Amsterdam, The Netherlands, 1992.
- [31] M. Schaefer, Graph ramsey theory and the polynomial hierarchy, Journal of Computer and System Sciences 62 (2001) 290–322.
- [32] M. Maschler, The inequalities that determine the bargaining set $\mathcal{M}_1^{(i)}$, Israel Journal of Mathematics 4 (1966) 127–134.